


MAGNUM LED 20W

NAŚWIETLACZE / FLOODLIGHTS

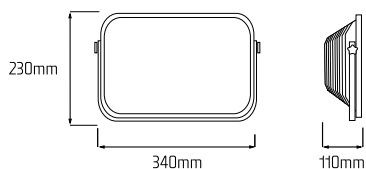

IP54

20W
= 150W

LED | **IK10** | **IP54** | **IP44** | 220-240V 50-60Hz | **24V** | **42V**



- Źródło światła: wysokowydajne LED GO!
- Moc: 20W
- Maksymalny strumień świetlny: 1800lm
- Stopień szczelności: IP 54 / IP44
- Uderzenioodporna obudowa
- Wielopozycyjne ramię
- Anty-olśnieniowy klosz wykonany z mrożonego poliwęglanu
- Przewód gumowy H07RN-F 2x1,0 mm² (5m)
- Waga: 2,0 - 2,1 kg

Opcjonalnie dostępne:

- Jedno gniazdo wbudowane w tylnej części oprawy
- Przewód gumowy H07RN-F 3x1,5mm² (5m)
- Wersja Basic z krótszym przewodem (2m)

- Light source: highly efficient LED GO!
- Power: 20W
- Total luminous flux: 1800lm
- Ingress protection class: IP 54 / IP 44
- Impact-resistant casing
- Multi-positional arm
- Anti-glare diffuser made of frozen polycarbonate
- Rubber cable H07RN-F 2x1,0mm² (5m)
- Weight: 2,0 - 2,1 kg

Optionally available:

- The one socket at the back side of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)
- Basic version with short cable (2m)

- source de lumière: SMD LED haute performance
- Puissance: 20W
- Degré d'étanchéité: IP54
- Boîtier résistant aux chocs
- Bras multi-positions
- Vasque anti-éblouissement en polycarbonate gelé
- Câble en caoutchouc H07RN-F 2x1,0 mm² (5m)
- Poids: 1,7kg

Disponible en option:

- Une prise de courant intégrée à l'arrière du luminaire

index	moc power puissance	zasilanie power connection connexion électrique	IP	rodzaj wtyczki plug type type de connecteur	gniazdo socket prise	kl.ochronności protection class classe de protection	waga weight poids[kg]
245398	20	220-240	54	UNI-SCHUKO	-	II	2,0
245428	20	220-240	54	UNI-SCHUKO	1xSCHUKO	I	2,1
245411	20	220-240	54	UNI-SCHUKO	1xPL-FR	I	2,1
245442	20	220-240	44	DK	-	II	2,0
245404	20	220-240	44	DK	1xDK	I	2,1
245435	20	220-240	44	CH	1xCH	I	2,1
MAGNUM LED 20W BASIC							
242472	20	220-240	54	UNI-SCHUKO	i	III	1,5