

---

# Workplace lighting

Professional | Standard



---

# It really matters

In recent years, we have continued and deepened our growing commitment to promoting an eco-friendly attitude towards business. Being aware of the importance of environmental protection behaviours and future generations inspires us to put maximum effort into offering the highest quality, energy-efficient products; and to make sure that the entire process and technology of their production do not have a negative impact on the ecosystem.

Our efforts and their effectiveness have been confirmed by the ISO 14001 certificate. This means that Lena Lighting has successfully implemented an environmental management system. The overall goal of this system is to create conditions for the functioning of the enterprise in order to minimise the negative impact on the natural environment. We have already succeeded, but we are going to continue our journey and invest in technology and knowledge aimed at care for the natural environment.



---

## Workplace lighting

### PROFESSIONAL

01

#### **Floodlights**

Top-quality, robust and waterproof floodlights for illuminating construction sites and workshops.

02

#### **Construction site illumination**

Specialised LED lighting used to illuminate construction sites and surface finishing works.

03

#### **Battery-powered hand lamps**

Top-quality rechargeable battery-powered LED hand lamps – a shockproof and waterproof solution for professional use.

04

#### **Head lamps**

Top-quality battery-powered LED head lamps guarantee freedom of work with both hands.

05

#### **Battery-powered inspection hand lamps**

Inspection hand lamps are an excellent choice for professional workshops and diagnostic stations.

06

#### **Workshop equipment**

Professional LED lamps to illuminate workplaces in a workshop.

07

#### **Machine lamps**

Professional lighting for car lifts and illuminating the workplace.

08

#### **Stands and accessories**

Accessories to support easy installation and operation of professional illumination of a workplace

---

## Workplace lighting

### STANDARD

01

#### **Floodlights**

High-quality floodlights that provide lighting also during work in difficult weather conditions.

02

#### **Construction site illumination**

Illumination of a construction site supporting safety and precision of individual works.

03

#### **Battery-powered hand lamps**

Battery-powered hand lamps are a proposal for people working or doing DIY repairs in a car workshop, mobile service or garage.

04

#### **Hand-held incandescent lamps**

Incandescent lamps made of durable materials are intended for indoor use – they are a perfect solution for offices and utility rooms.

05

#### **Battery-powered hand lamps**

Ergonomic lighting designed to illuminate various elements, not requiring access to electric supply.

06

#### **Head lamps**

LED head lamps allow you to work freely with both hands.

07

#### **Mains-powered hand lamps**

Ergonomic lighting providing a range of amenities in places with an easy access to electric supply.

---

100%

# Made in **Poland**

Based on 100% Polish capital, LENA LIGHTING S.A. designs, constructs and manufactures professional lighting solutions.

It is one of the largest companies and one of the most recognised brands in the region of Greater Poland, where its headquarters and production facilities are located.

The company has been listed on the main market of the Warsaw Stock Exchange since 2005. By developing exports to 70 countries around the world, it has achieved the position of an undisputed leader of professional luminaire exporters among Polish manufacturers.

32+

**years of experience**



---

Our production lines are constantly developed and modernised

Środa Wielkopolska, PL



# Magnum **MultiBattery** family

Compatible floodlights with batteries of popular brands

Our offer includes a line of universal, wireless floodlights with excellent parameters. These compact luminaires work with batteries of five brands: Bosch, Milwaukee, Makita, DeWalt and Berner.

 **5 years**  
warranty

Workplace lighting **Professional** ■

# The best choice for professionals

Professional workshop and work lights ensure maximum visual comfort during work, which is why it is so important to choose the right manufacturer of lighting. Lena Lighting features a combination of experience, knowledge and innovative technology. We offer LED workshop lighting refined in every respect. Perfect for construction, finishing, agricultural and workshop works. Workshop lights and working materials that we produce comply with applicable legal standards and other requirements.



**NEW**

LED 20W IP20 IK09 III





**COMPATIBLE  
WITH 18V BATTERIES\***

## Magnum MultiBattery XS

Luminous flux [lm]:	2300	Index No	Compatible with systems:
Colour temperature [K]:	4000	249068	Bosch, Milwaukee, DeWalt, Berner 18V
Diffuser/body type:	Lens matrix / PP	249426	Bosch, Makita 18V
Supply voltage [V]:	18		

### Features:

- Uniform and stable directional lighting
- Anti-glare diffuser made of polycarbonate
- Convenient to transport
- It has a switch providing 4-step luminous flux control
- Can be mounted on Future Stand

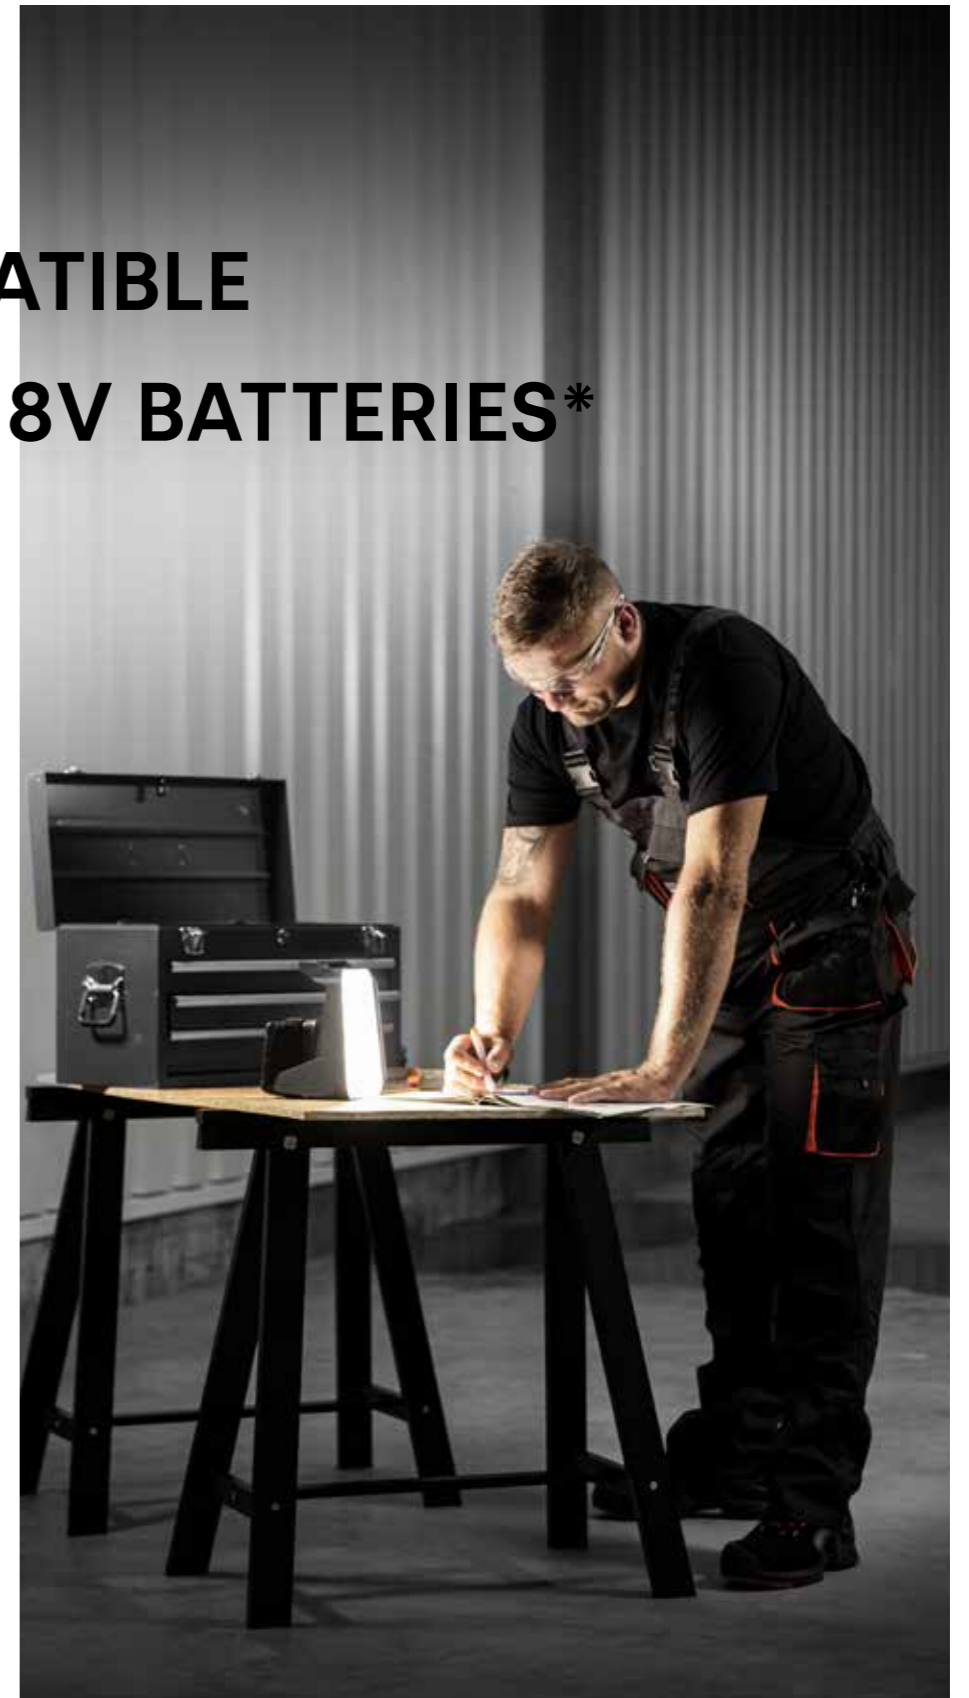

\* of the most popular power tool brands

# Durable and impact resistant

The body is made of a very durable and flexible material that ensures the maximum level of impact resistance: IK10. Thanks to this, the luminaire can be used in conditions conducive to mechanical damage (e.g. on construction sites), and a fall from the stand does not pose any risk to luminaire's further operation.

— Ready to work in heavy duty conditions





**NEW**

LED 32W IP20 IK10 III




## Magnum MultiBattery M

Luminous flux [lm]:	4050	Index No	Compatible with systems:
Colour temperature [K]:	4000	249075	Bosch, Milwaukee, DeWalt, Berner 18V
Diffuser/body type:	Lens matrix / PP	249433	Bosch, Makita 18V
Supply voltage [V]:	18		

### Features:

- Uniform and stable directional lighting.
- Anti-glare diffuser made of polycarbonate
- Convenient to transport
- It has a switch providing 4-step luminous flux control
- Can be mounted on Future Stand



**MAXIMUM  
IMPACT  
RESISTANCE**



**NEW**

LED  
73W IP20 IK10 III




## Magnum MultiBattery L

Luminous flux [lm]:	9250	Index No	Compatible with systems:
Colour temperature [K]:	4000	249082	Bosch, Milwaukee, DeWalt, Berner 18V
Diffuser/body type:	Lens matrix / PP	249440	Bosch, Makita 18V
Supply voltage [V]:	18		

### Features:

- Uniform and stable directional lighting.
- Anti-glare diffuser made of polycarbonate
- Convenient to transport
- It has a switch providing 4-step luminous flux control
- Can be mounted on Future Stand



LED  
20W IP20 IK09 III



PROFESSIONAL 18V SYSTEM  
Powered by  
**BOSCH**

## Magnum Battery XS


Luminous flux [lm]:	2300
Colour temperature [K]:	4000
Diffuser/body type:	Lens matrix / PP
Supply voltage [V]:	18

Index No	Battery	Capacity [mAh]	Charger
249006	-	-	-
249013	1 pc	2	-
249020	1 pc	2	+
249303	2 pc	2	-
249310	2 pc	2	+

### Features:

- Uniform and stable directional lighting.
- Anti-glare diffuser made of polycarbonate
- Convenient to transport
- It has a switch providing 4-step luminous flux control
- Can be mounted on Future Stand

Versions with a 5 mAh battery also available




The battery is compatible with other Bosch devices.



LED  
32W IP20 IK10 III




PROFESSIONAL 18V SYSTEM  
Powered by  
 **BOSCH**

## Magnum Battery M

Luminous flux [lm]:	4050
Colour temperature [K]:	4000
Diffuser/body type:	Lens matrix / PP
Supply voltage [V]:	18


Index No	Battery	Capacity [mAh]	Charger	Stand
249228	-	-	-	-
249235	1 pc	2	-	-
249327	1 pc	2	-	+
249341	2 pc	2	-	+
249334	1 pc	2	+	+
249358	2 pc	2	+	+

Versions with a 5 mAh battery also available



LED  
73W IP20 IK10 III



PROFESSIONAL 18V SYSTEM  
Powered by  
 **BOSCH**


## Magnum Battery L

Luminous flux [lm]:	9250
Colour temperature [K]:	4000
Diffuser/body type:	Lens matrix / PP
Supply voltage [V]:	18

Index No	Battery	Capacity [mAh]	Charger	Stand
249259	-	-	-	-
249266	1 pc	2	-	-
249365	1 pc	2	-	+
249372	1 pc	2	+	+
249389	2 pc	2	-	+
249396	2 pc	2	+	+

### Features:

- Uniform and stable directional lighting.
- Anti-glare diffuser made of polycarbonate
- Convenient to transport
- It has a switch providing 4-step luminous flux control
- Can be mounted on Future Stand






# Magnum **Future family**

Luminaires from the MAGNUM FUTURE LED family are a modern, complete solution providing illumination of workplaces. They can be successfully used wherever you need strong lighting, durable long-life design and a number of enhancements that will make your work easier.

 **5 years**  
warranty

LED  
20W    IP54  
          IP44    IK10    I, II, III

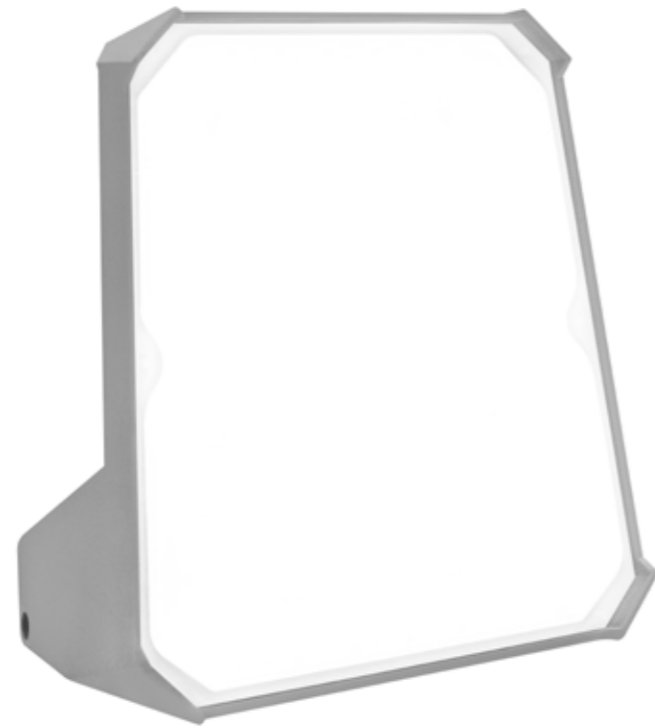

## Magnum Future LED XS | XS Accu


Luminous flux [lm]:	2300
Colour temperature [K]:	4000
Diffuser/body type:	frosted, lens matrix / PP
Supply voltage [V]:	220-240; 24; 42-48; 110

Index No	Battery	Beam angle [°]	Socket type
248351	-	120	-
248528	-	45	-
248368	-	120	Type E
248535	-	45	Type E
248511	+	120	-
248818	+	45	-

**Features:**

- It provides uniform and stable directional lighting
- Made of impact-resistant polypropylene
- Anti-glare diffuser made of polycarbonate
- Equipped with a movable, multi-position arm also acting as a hook

Versions with other plugs and sockets (DK, SCHUKO, CH) and low voltage versions are also available.



LED 32W IP54 IK10 I, II, III  
IP44



**Highest quality diffuser**

The diffuser is made of new generation polycarbonate designed for LED lighting.



**Light and handy**

Very light frame weighing only 2.8 kg. Thanks to the comfortable handle, it can be easily carried from one workplace to another.

## Magnum Future LED 32W | Accu



Luminous flux [lm]:	4300
Colour temperature [K]:	4000
Diffuser/body type:	frosted / PP
Supply voltage [V]:	220-240; 24; 42-48; 110

Index No	Battery	Switch	Socket type
247200	-	-	-
247309	-	-	Type E
247040	-	+	Type E
247125	+	-	-

**Features:**


- High luminous flux and maximum impact resistance
- It provides uniform and stable directional lighting
- Made of impact-resistant polypropylene
- Anti-glare diffuser made of polycarbonate
- High ingress protection – IP54/IP44

Versions with other plugs and sockets (DK, SCHUKO, CH) and low voltage versions are also available.

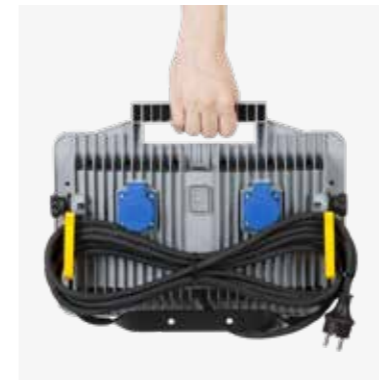

**Comfort of use**



The luminaire has ergonomic handles for winding the cord, which facilitates its transport.

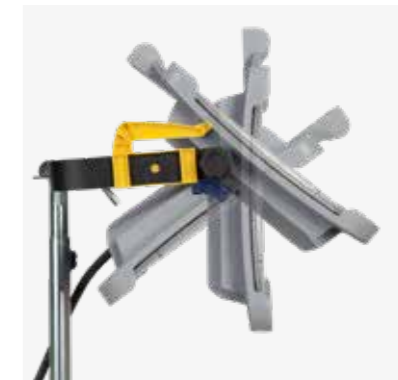

**Wide configuration options**

The multi-position arm enables adjusting the angle of light distribution. The light beam can be conveniently directed precisely onto the given area/space.

LED  
50W    IP54  
IP44    IK10    I, II, III

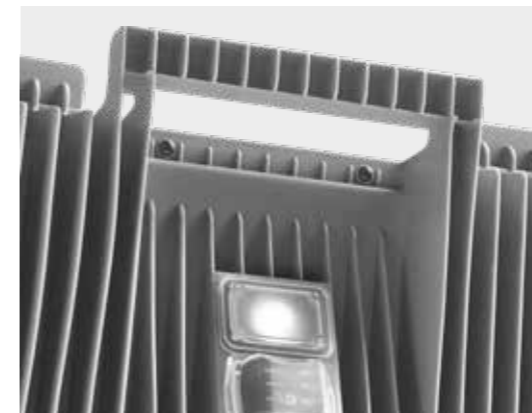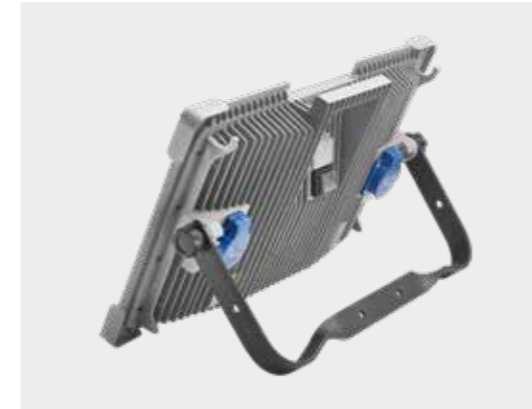

## Magnum Future LED XL 50W


Luminous flux [lm]:	6500
Colour temperature [K]:	4000
Diffuser/body type:	frosted / PP
Supply voltage [V]:	220-240; 24; 42-48

Index No	Switch	Socket type
247408	-	-
247354	-	Type E
247460	+	Type E

Versions with other plugs and sockets (DK, SCHUKO, CH) and low voltage versions are also available.

### Features:

- High luminous flux and maximum impact resistance
- It provides uniform and stable directional lighting
- Made of impact-resistant polypropylene
- Anti-glare diffuser made of polycarbonate



Made in **Poland**



LED 78W IP54 IK10 I, II  
IP44



**LUMINOUS  
FLUX  
11000 LM**




## Magnum Future LED XL MAX 78W

Luminous flux [lm]:	11000	Index No	Switch	Socket type
Colour temperature [K]:	4000	248863	-	-
Diffuser/body type:	frosted / PP	248894	-	Type E
Supply voltage [V]:	220-240	248955	+	Type E

Versions with other plugs and sockets (DK, SCHUKO, CH) are also available.

### Features:

- High luminous flux and maximum impact resistance
- It provides uniform and stable directional lighting
- Made of impact-resistant polypropylene
- Anti-glare diffuser made of polycarbonate





## Giant LED Evo

Luminous flux [lm]: 33144

Colour temperature [K]: 4000

Diffuser/body type: matte / PP

Supply voltage [V]: 220-240

Index No

901263

Switch

-


Socket type

Type E

Versions with other plugs and sockets (DK, SCHUKO, CH) are also available.

### Features:

- High luminous flux and maximum impact resistance
- High ingress protection
- Low weight
- Light and handy portable lamp



LED  
17W IP54 IK08 II




## Flato LED M

Luminous flux [lm]:	1750	Index No	Colour temperature [K]
Colour temperature [K]:	4000; 5000	622021	4000
Diffuser/body type:	opal / PP	622076	5000
Supply voltage [V]:	220-240		
Illumination angle [°]:	120		

### Features:

- It provides uniform and stable directional lighting
- Body made of copolymer with rubber
- Anti-glare diffuser made of frosted PC with an UV stabiliser
- The small size and compact design make it convenient to transport



LED  
47W IP54 IK07 II




## Flato LED L

Luminous flux [lm]:	4600	Index No	Colour temperature [K]	Luminous flux [lm]
Colour temperature [K]:	4,000; 5000	622199	4000	4600
Diffuser/body type:	opal / PP	622250	5000	4600
Supply voltage [V]:	220-240			
Illumination angle [°]:	120			

### Features:

- It provides uniform and stable directional lighting
- Body made of copolymer with rubber
- Anti-glare diffuser made of frosted PC with an UV stabiliser
- The small size and compact design make it convenient to transport



LED  
94W IP54 IK07 II





## Tower Lite LED

Luminous flux [lm]:	9200	Index No	Colour temperature [K]	Luminaire's luminous flux [lm]
Colour temperature [K]:	4000	622359	4000	9200
Diffuser/body type:	opal / PP			
Supply voltage [V]:	220-240			
Illumination angle [°]:	120			

### Features:

- It provides uniform and stable directional lighting
- Body made of copolymer with rubber
- Anti-glare diffuser made of frosted PC with an UV stabiliser
- The small size and compact design make it convenient to transport

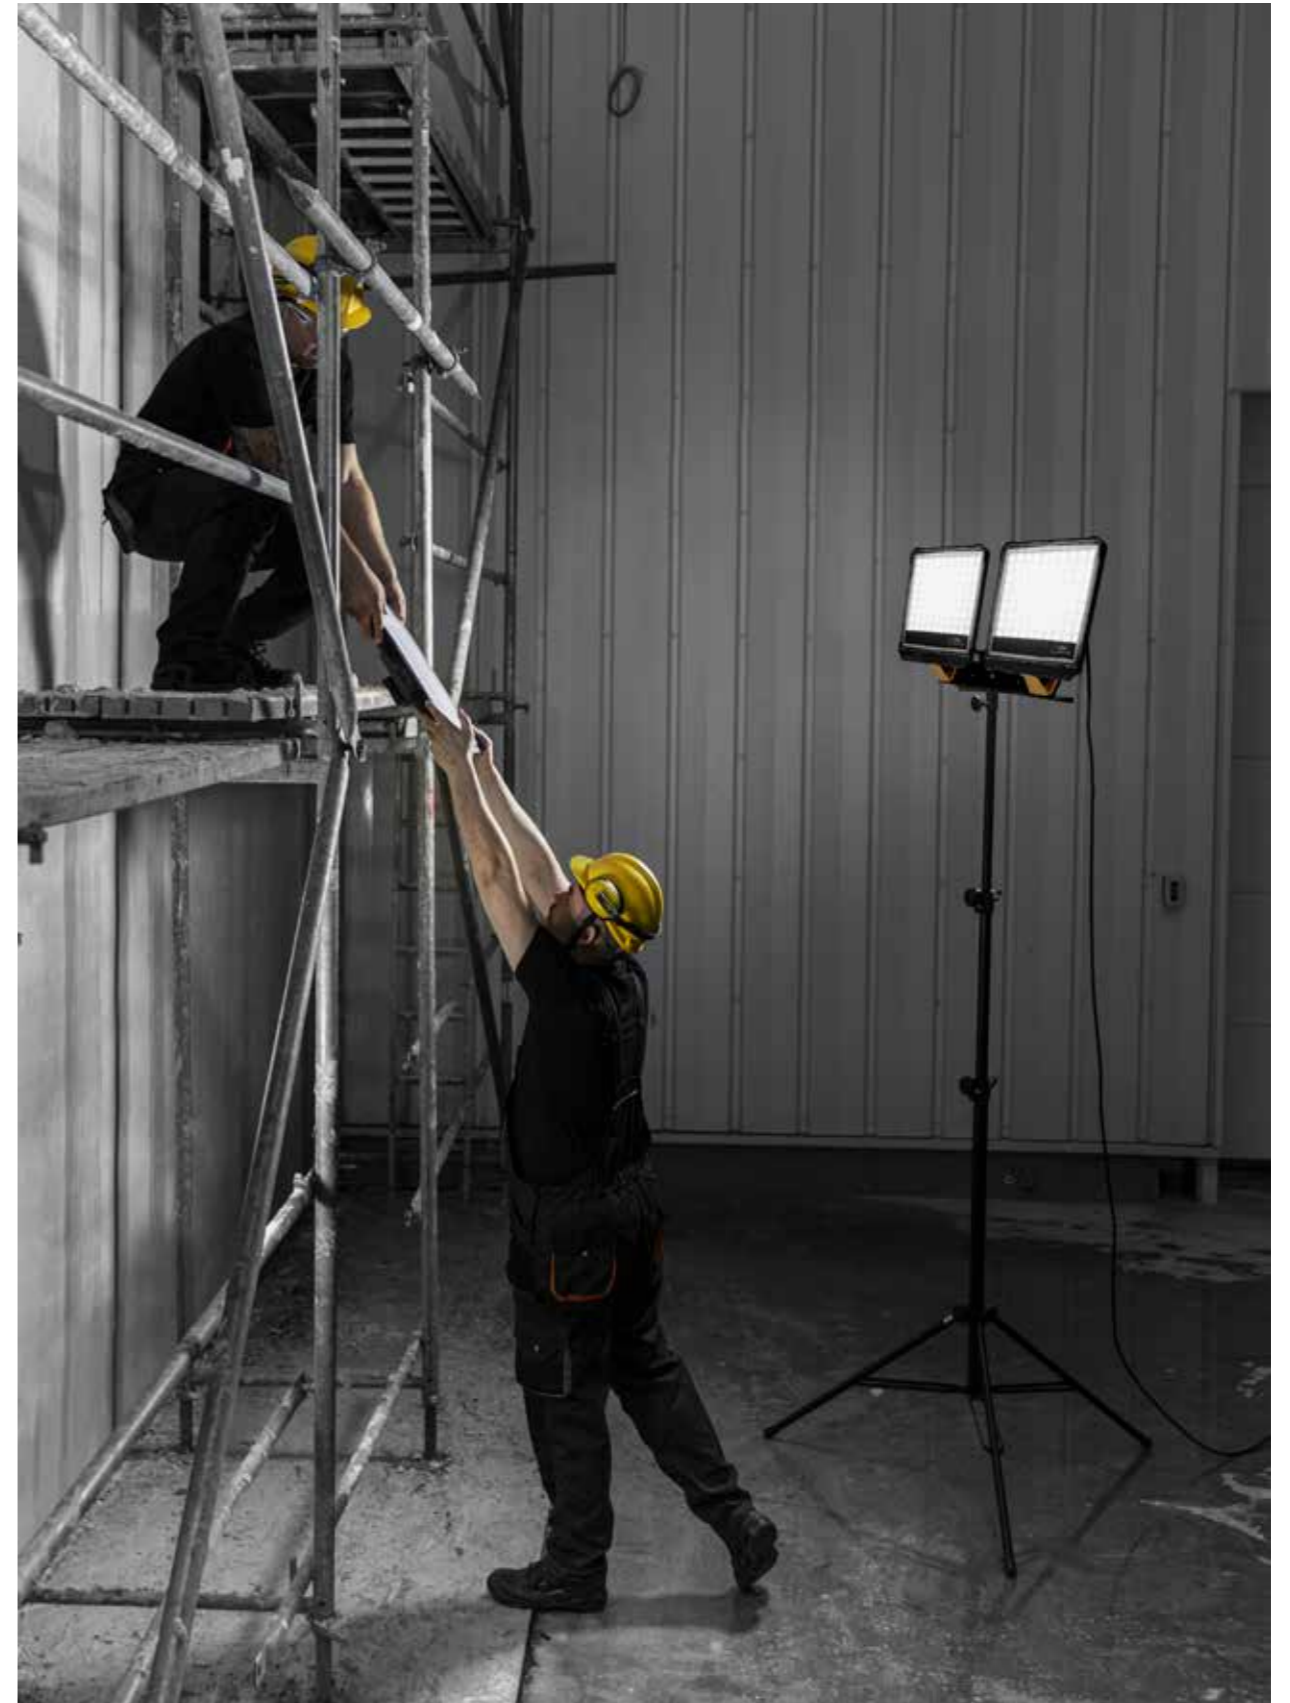

LED  
45, 46W IP44 IK07 II




## Flato LED FL

Luminous flux [lm]:	3800	Index No	Motion and dusk sensor
Colour temperature [K]:	4000	622182	-
Diffuser/body type:	opal / PP	622205	+
Supply voltage [V]:	220-240		
Illumination angle [°]:	120		

### Features:

- It provides uniform and stable directional lighting
- Built-in motion sensor and dusk sensor (optional)
- Body made of copolymer with rubber
- Anti-glare diffuser made of frosted PC with an UV stabiliser
- The small size and compact design make it convenient to transport



LED  
20W IP54 IP20 IK08 I, II, III




## Site Lite Future LED | Accu

Luminous flux [lm]:	2000	Index No	Socket type	Magnet	Battery
Colour temperature [K]:	4,000; 5000	621086	-	-	-
Diffuser/body type:	opal / PP+T	621185	-	+	-
Supply voltage [V]:	220-240; 24; 42-48	621093	Type E	-	-
Illumination angle [°]:	360	621192	Type E	+	-
		621444	-	-	+

### Features:

- Construction site luminaire shining in all directions
- Two versions available – with battery and cable
- Built-in 2000 mAh Li-ion battery (ACCU version)
- Provides even and stable light distribution all over the room
- Equipped with a protruding, folding hook for hanging the cable
- Available accessories: magnets screwed to the luminaire base, stand holder

Versions with other plugs and sockets (DK, SCHUKO, CH) and low voltage versions are also available.

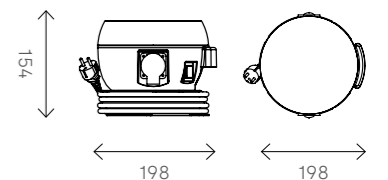

LED  
49W IP54 IK07 I





## Plaster Lite Future LED

Luminous flux [lm]:	6100	Index No	Colour rendering index (Ra):
Colour temperature [K]:	4000	359217	>80
Diffuser/body type:	transparent / PC		
Supply voltage [V]:	220-240		
Illumination angle [°]:	45 / 120		

### Features:

- Provides even and stable illumination of the work surface, thanks to which all surface irregularities are immediately visible.
- The body is made of aluminium and rubber and is highly impact-resistant and water splash-proof.

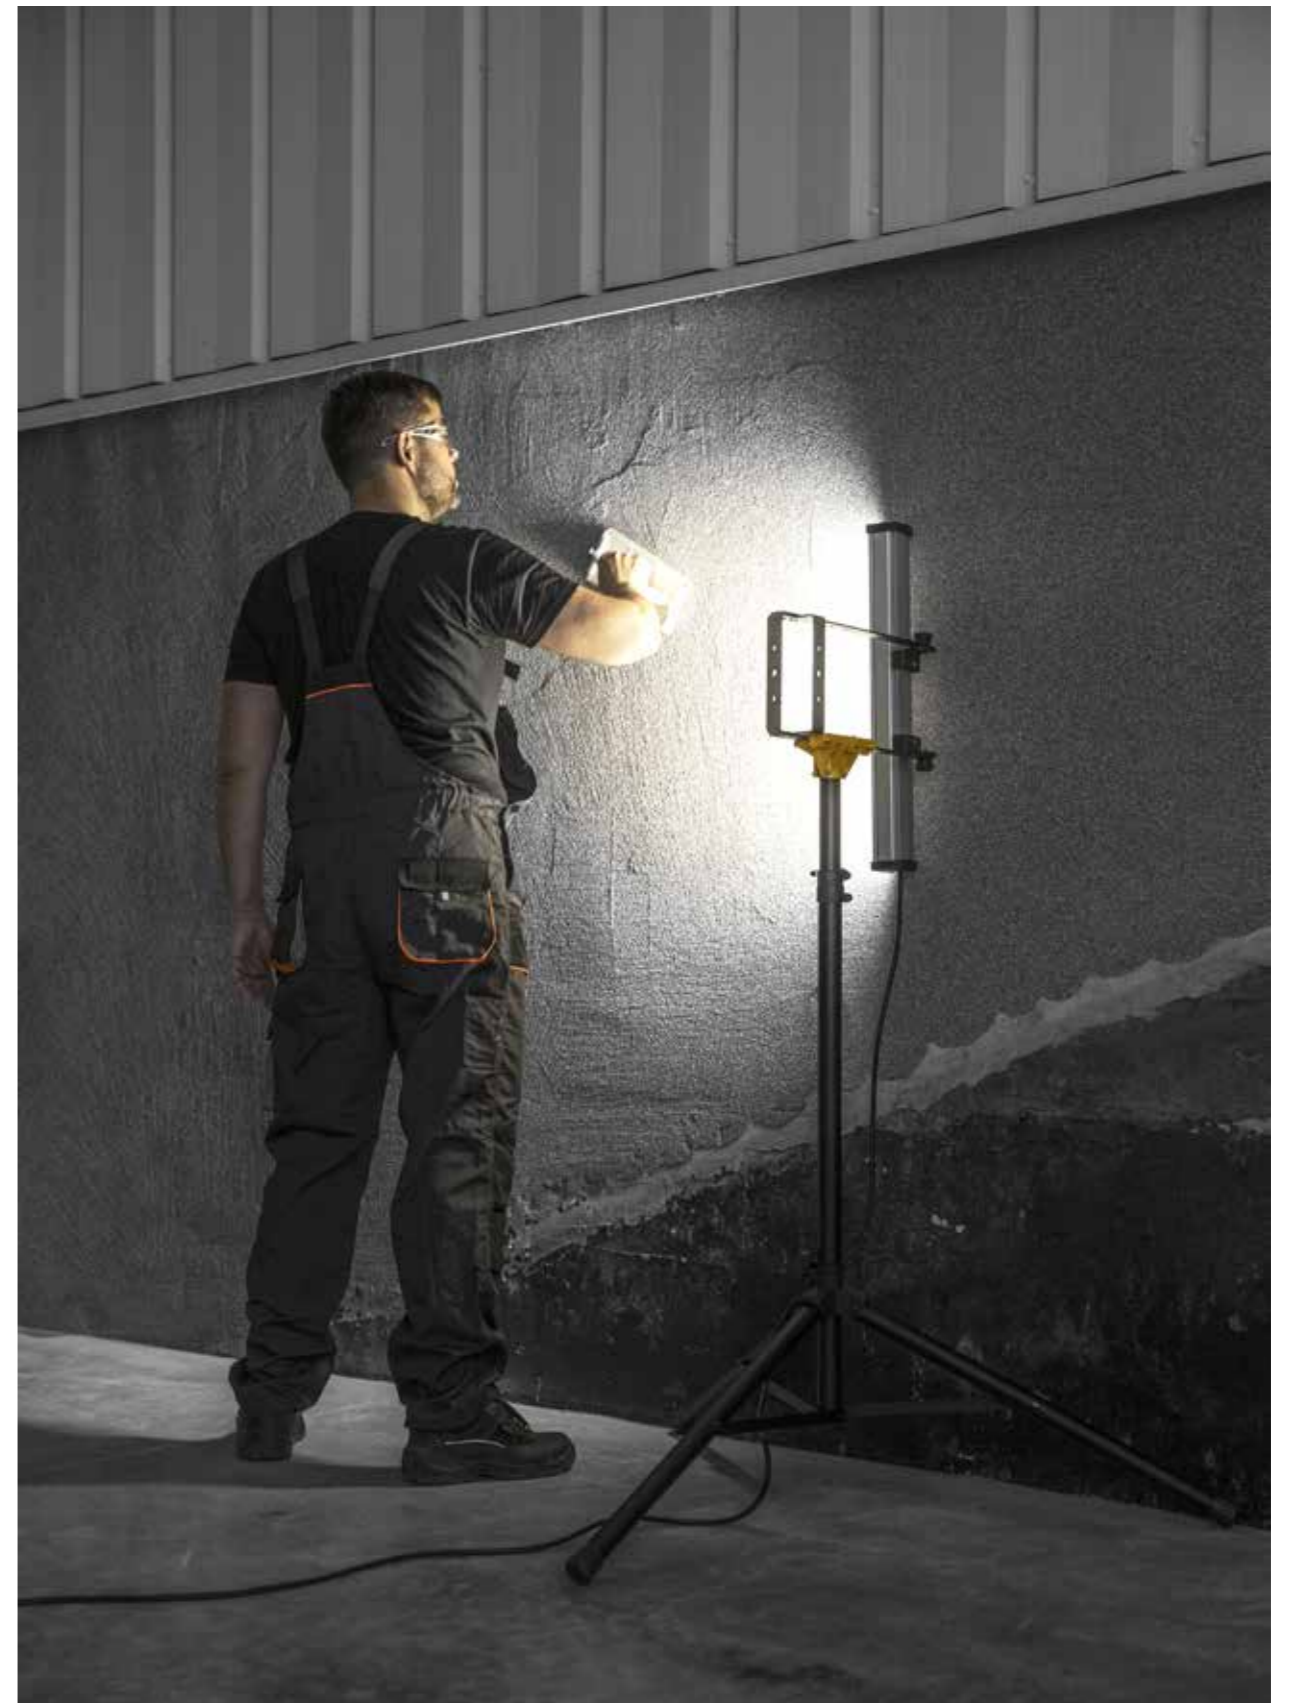






**Handle for easy portability**

The FUTURE BALL luminaire is equipped with a handle for easy adjustment and carrying.

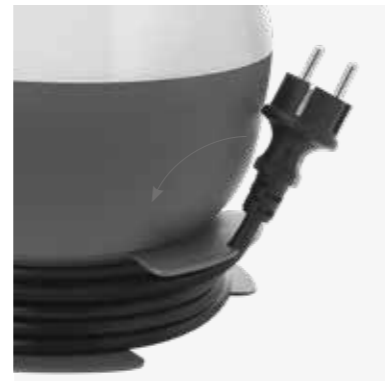

**Ergonomic cable hook przewodu**

It has a suitable cable reel and a hook, which makes it easy to carry and store.



**Magnets**

A version with magnets ensuring adhesion to the ground or ceiling is available.



**Hook for hanging**

Hook for hanging allows for quick installation of the lamp on the ceiling.



## Future Ball LED


Luminous flux [lm]:	2400
Colour temperature [K]:	4000
Diffuser/body type:	opal / PP
Supply voltage [V]:	220-240; 24; 42-48
Illumination angle [°]:	360

### Features:

- Construction site luminaire shining in all directions
- Integrated cable reel
- Provides even and stable light distribution all over the room
- Equipped with a protruding, folding hook for hanging the cable
- Available accessories: magnets screwed to the luminaire base, stand holder

Index No	Socket type	Magnet	Switch
619021	-	-	-
619267	-	+	+
619229	Type E 2 pcs.	-	-
619236	Type E 2 pcs.	-	+
619281	Type E 2 pcs.	+	+

Versions with other plugs and sockets (DK, SCHUKO, CH) and low voltage versions are also available.





01

### **Easy and versatile installation**

It allows to minimise the time needed to prepare the lamp for operation. A wide range of installation options in all environmental conditions is a special characteristic of this lamp.

02

### **Energy efficiency**

It helps save a considerable amount of money. LED technology gives 50-70% energy savings while ensuring the same level of illumination.

03

### **Can be formed in light lines**

The possibility of connecting individual chains into light lines of any length, up to 120 m, with up to 40 light points.

04

### **Handy and easy to carry**

The FUTURE LINE LED luminaire is very easy to assemble and disassemble. It can be quickly packed and moved to another place.



# Rodzina **Future Line** family **Line**

FUTURE LINE LED is a luminaire designed for fast and universal lighting of workplaces.

Its unique shape allows for express assembly even in non-typical places.

 **5 years**  
warranty

LED  
24, 32W IP44 IK09 II, III



Unconventional solutions,  
multitude of possibilities.



## Future Line LED

Luminous flux [lm]:	2040; 2720
Colour temperature [K]:	5000
Diffuser/body type:	opal / PP
Supply voltage [V]:	220-240


Index No	Power [W]	Luminous flux [lm]	Cord length [m]
248573	24	2040	9
248542	32	2720	11

48V versions also available.

Index No	Accessory
246173	set of magnets for Future Line luminaires

### Features:

- Rope light for quick and temporary lighting of the workplace
- The special shape of luminaires allows for their assembly in construction site conditions
- Possibility of creating max. 120 m light line



LED  
5+1W IP44 IK09 III




## Crane Cob LED

Luminous flux [lm]:	5W COB - 450lm, 1W SMD - 120lm
Rated power [W]:	5W COB LED + 1W SMD LED
Battery:	Li-ion 3,7V 2600mAh
Charger:	USB 100-240 AC/DC 5V1A + 1.5m micro
Charging time / illumination time [h]	3 / 3-5.5

Index No	Socket type
334764	UNI-SCHUKO

### Features:

- Strong magnetic fastener in the base
- Battery charge and discharge indicator
- Lamp movable in the range of 120°

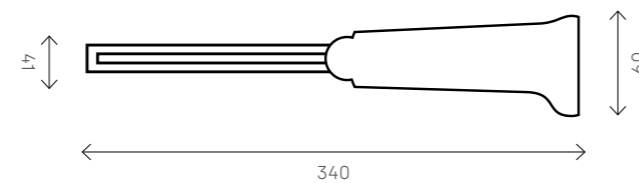

LED  
2+5+4x1W IP20 IK09 III




## Pelican Evo LED

Luminous flux [lm]:	800	Index No	Colour temperature [K]
Rated power [W]:	2W LED (head) + 5W LED + 4x 1W SMD (main source)	608582	6500
Battery:	Li-ion 3,7V 4400mAh		
Charger:	USB 100-240 AC/DC 5V1A + 1,5m micro		
Charging time / illumination time [h]	6 / 5h at full power		

### Features:

- High durability, strong light beam
- Long working time, which allows you to focus on the task at hand
- The emitted light is comfortable for the eyes

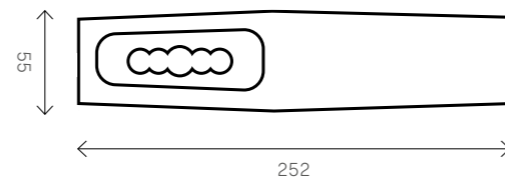

**NEW**

LED  
4+4W IP54 IK07 III




## Crop Future LED

Luminous flux [lm]:	120; 400	Index No	Colour temperature [K]
Rated power [W]:	4 W COB LED + 4 W SMD LED	608599	6500
Battery:	Li-ion 3,7V 2600mAh		
Charging:	+ 1.5m micro cable		
Charging time / illumination time [h]	3 / 3.5-10		

### Features:


- The luminaire is characterised by high durability, strong light beam and a long working time
- The emitted light is comfortable for the eyes
- It can be used as a workplace luminaire to illuminate workplaces, workshops or garages.

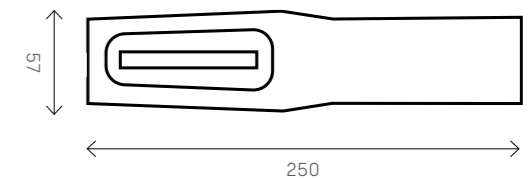

LED  
3W IP40 IK09 III



**TURNING ON  
BY HAND  
MOVEMENT**

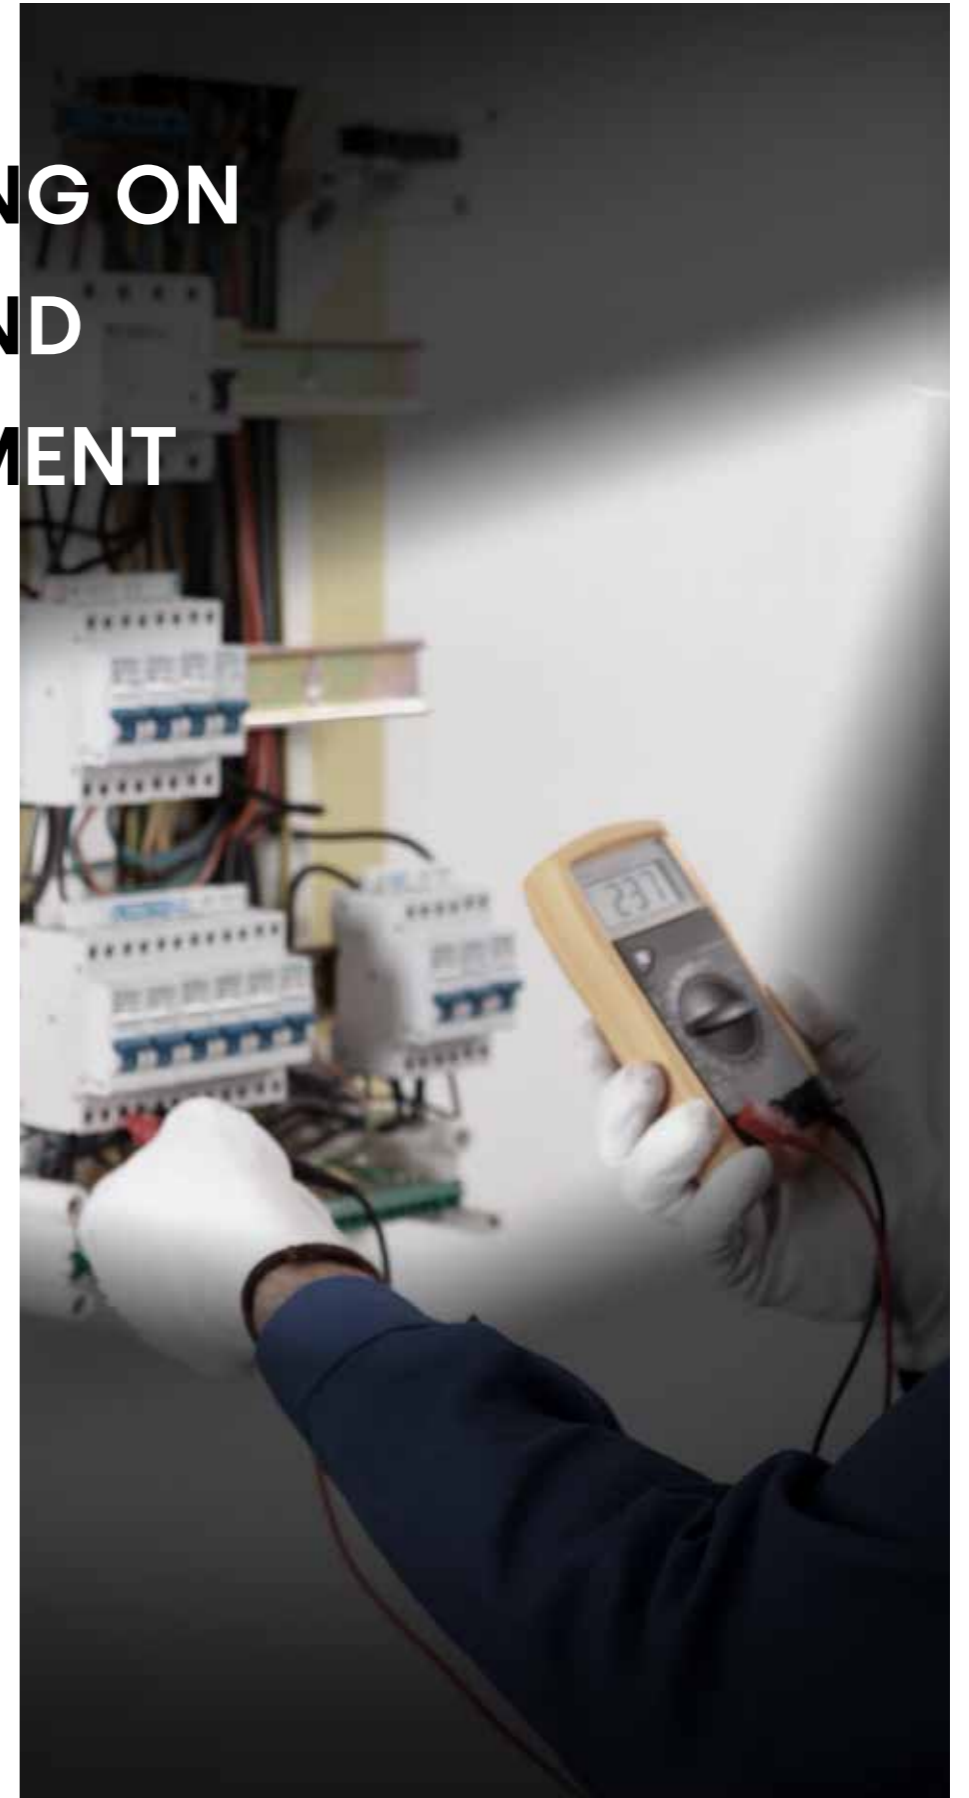


## Cyclop LED

Luminous flux [lm]:	150; 300	Index No	Colour temperature [K]
Rated power [W]:	3	334689	6500
Battery:	Li-ion 3,7V 1500mAh		
Charging:	+ 1.5m micro cable		
Charging time / illumination time [h]	3 / 2.5-4		

### Features:

- Top element movable in the range of 60°
- Battery charge indicator
- Turning on the luminaire by hand movement enabled by the built-in sensor
- Non-slip strip
- Modern design and the highest quality materials

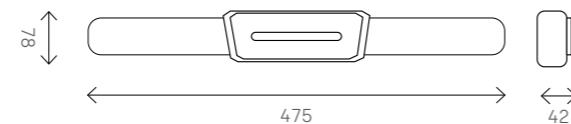



# Lampy inspekcyjne **Profi Slim**

Innovative luminaires designed to illuminate car workshops.

The available versions can be mounted on various car lifts and in vehicle pits.

 **5 years**  
warranty

LED  
4, 12, 24W IP44 IK09 II




## Profi Slim LED

Luminous flux [lm]:	360, 1080, 2160	Index No	Power [W]
Colour temperature [K]:	4000	378041	4
Diffuser/body type:	matte / ABS	378157	12
Supply voltage [V]:	220-240	378164	24

### Features:

- Matte diffuser made of polycarbonate
- Rubber cable: H05RN-F 2x1mm<sup>2</sup> (5m)
- Possibility to purchase and replace components

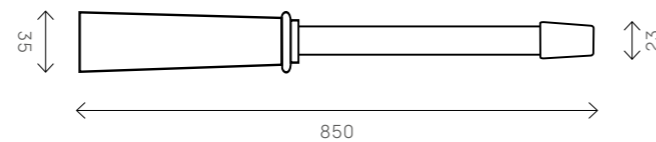

LED  
12W IP54 IK09 II




## Profi LED Service Set 12W 230V

Luminous flux [lm]:	1080	Index No	Plug type
Colour temperature [K]:	4000	267215	UNI-SCHUKO
Diffuser/body type:	transparent / rubber		
Supply voltage [V]:	220-240		

### Features:

- Handle made of aluminium
- The ends are covered with rubber, which improves the stability of the set and additionally protects the mask against scratches
- Grip distance: 1180mm – 1780mm

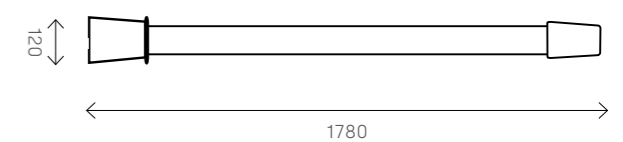

**NEW**

LED  
1W IP54 IK07




## Clima Evo UV

Light source:	UV diode	Index No	Light source:
Rated power [W]:	1	608575	UV LED
Power supply:	6 x AAA batteries		
Net weight [kg]:	0.2		

### Features:

- Kit for detecting leaks in the air conditioning system
- Thanks to the use of appropriate UV wavelengths and special protective glasses, the leak location is clearly visible
- Includes a black strip, batteries (6xAAA) and UV glasses

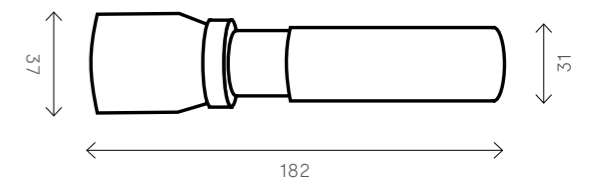



LED  
14, 21W IP65 IK10 I, III



## Profi Slim Line LED



Luminous flux [lm]:	1750; 2550
Colour temperature [K]:	4000
Diffuser/body type:	matte / ABS
Supply voltage [V]:	220-240, 24

Index No katalogowy	Number of luminaires	Power [W]	Luminous flux [lm]
378805	2 pc	2x14	2x1750
378881	2 pc	2x21	2x2550
378898	4 pc	4x14	4x1750
378812	4 pc	4x21	4x2550
378904	6 pc	6x14	6x1750
378829	6 pc	6x21	6x2550

### Features:

- Impact-resistant body
- Anti-glare diffuser made of frosted polycarbonate
- H07RN-F 3x1.5 rubber cable
- Possibility to purchase and replace components

Low voltage versions also available.

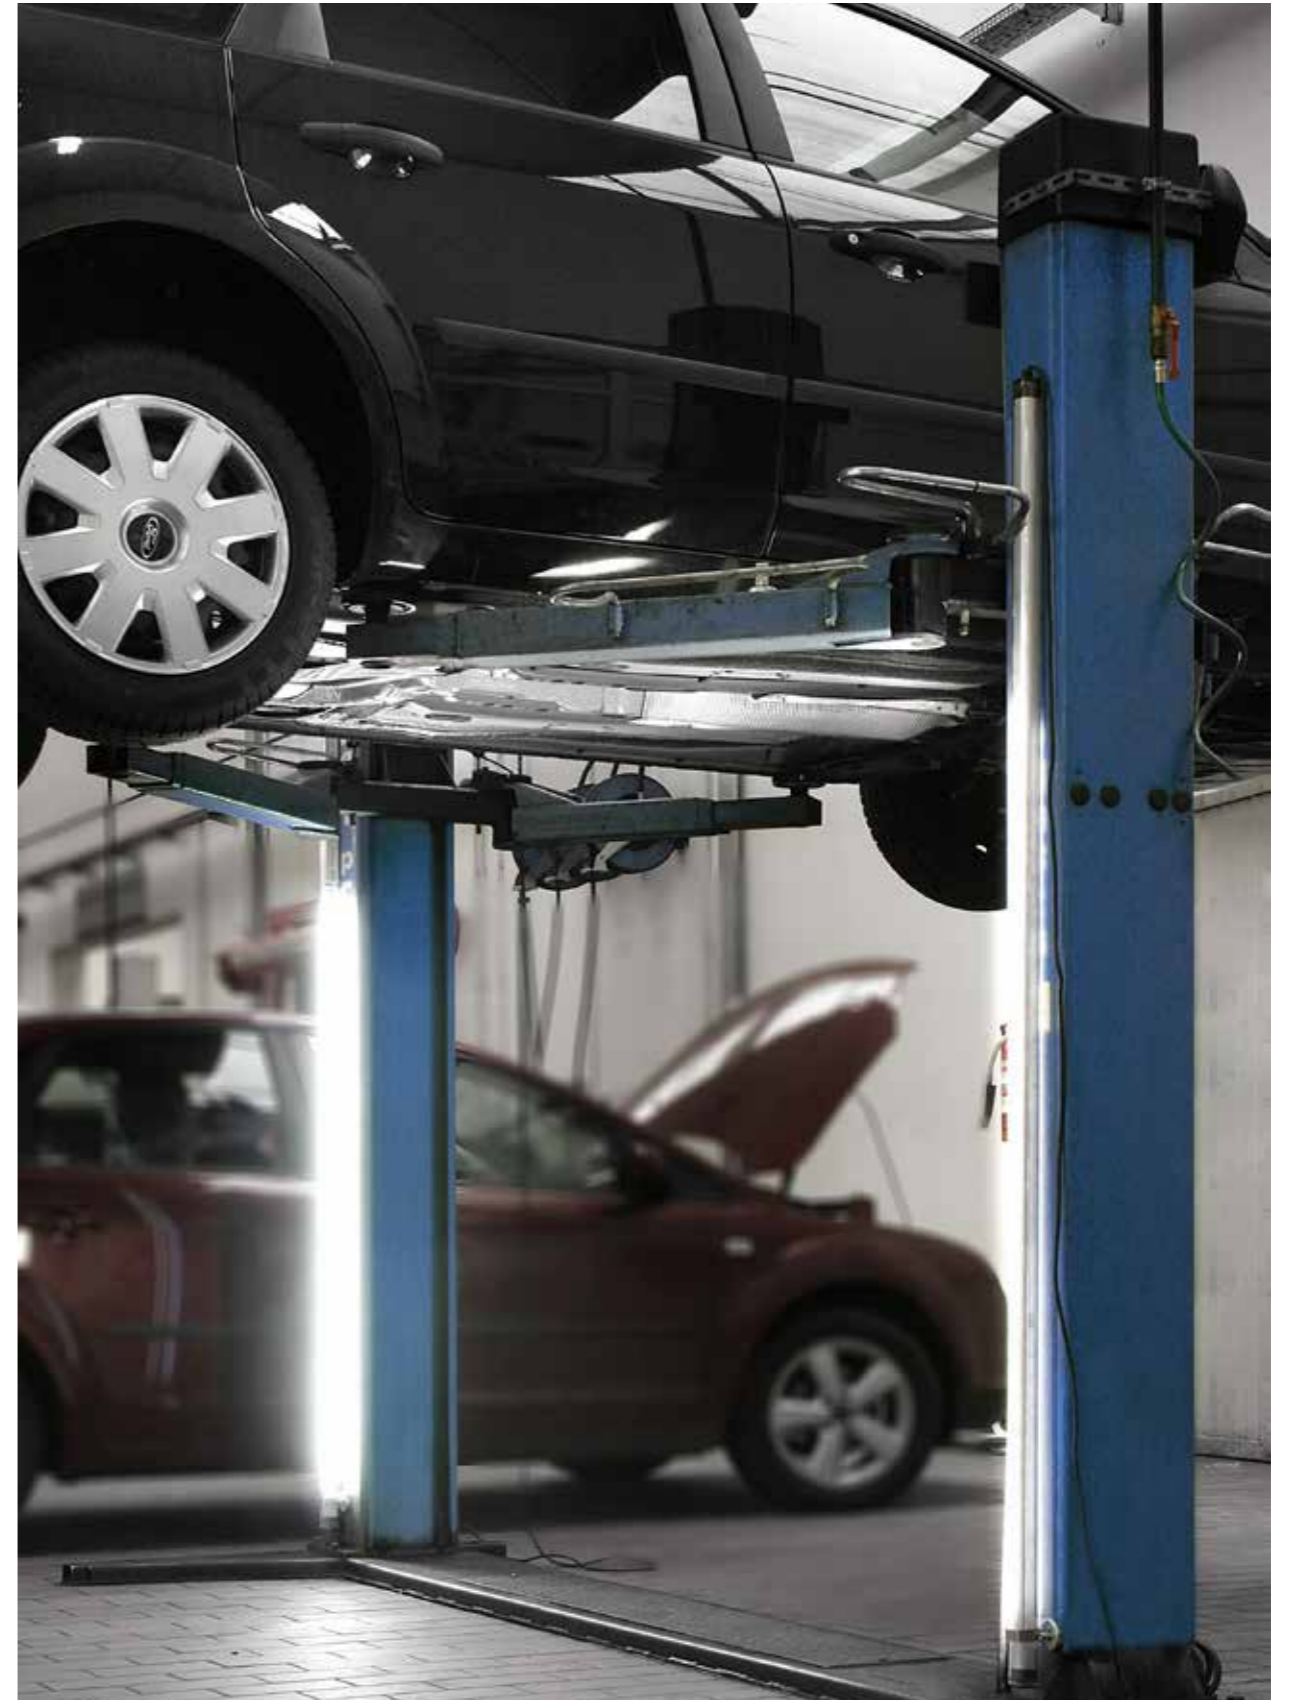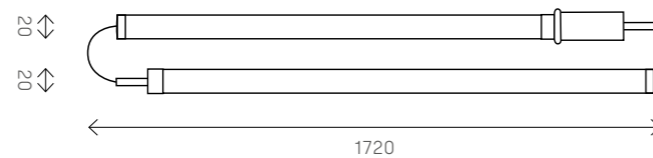

LED  
13-40W IP54 IK10 I, II, III



## Type 101 LED

Luminous flux [lm]: 1694 – 3387


Colour temperature [K]: 4000

Diffuser/body type: matte / ABS

Supply voltage [V]: 220-240, 24

Nr Index No	Supply voltage [V]	Through-wiring	Protection class
888809	220 - 240	-	I
316074	220 - 240	LS2	II
888854	220 - 240	-	I
317590/PA	220 - 240	LS1	I
317552/PA	220 - 240	-	I

Low voltage versions also available.  
Product available on request.



### Features:

- The perfect solution for illuminating car lifts, pits, machines, workstations, etc.
- High ingress protection allows it to be used in the most difficult weather conditions
- Numerous accessories provide a wide range of mounting options

LED  
12, 24W IP65 IK10 II



## Type 107 LED

Luminous flux [lm]: 1694 – 3387

Colour temperature [K]: 4000

Diffuser/body type: matte / ABS


Supply voltage [V]: 220-240

Index No	Power [W]	Dimensions [mm]:
317170	12	42x640
317163	24	42x1220

Low voltage versions also available.  
Product available on request.

### Features:

- Light source cover made of frosted and impact-resistant polycarbonate
- The length of the luminaire can be tailored to customer requirements
- Suspended version for illuminating workstations available
- High ingress protection allows it to be used in the most difficult weather conditions



**NEW**



## Future Stand

Height when extended / folded [cm]: 200 / 108

Weight [kg]: 2.3

Compatible with products:

Nr Index No	Magnum Future XS LED	Magnum Future LED	Magnum Future XL LED	Future Ball LED	Quest Plus LED M/L	UV-C Sterilon 72/108W	UV-C Sterilon 36W	Flato LED M/L	Versatile use
000737	✓	✓	✓	✓	✓	✓	✗	✓	✓

**Features:**

- Stand enabling tool-free and quick assembly of all luminaires from the Magnum Future family
- Robust design
- High quality materials

**Universal stand with Click Head system for tool-free assembly.**





## Standard stand

Height when extended / folded [cm]: 200 / 108

Weight [kg]: 2.2

Compatible with products:

Index No	Magnum Future XS LED	Magnum Future LED	Magnum Future XL LED	Future Ball LED	Quest Plus LED M/L	UV-C Sterilon 72/108W	UV-C Sterilon 36W	Flato LED M/L	Versatile use
000720	✓	✓	✓	✗	✓	✗	✓	✗	✓

Features:

- Stand enabling quick assembly of all luminaires from the Magnum Future family
- Robust design
- High quality materials



## Giant steel stand

Compatible with products:

Index No	Product	Giant LED
000294	stand up to 3 m	✓
000300	stand mounting panel	✓

Features:


- Stand enabling quick assembly of all luminaires from the Giant family
- Robust design
- High quality materials

Workplace lighting **Standard** ■

# The best choice for DIY enthusiasts.

Workshop and work lights produced by the Polish manufacturer Lena Lighting provide illumination of appropriate technical parameters and in accordance with applicable standards. All the products feature a combination of experience, knowledge and state-of-the-art technology. They are produced with care for the natural environment and will prove themselves in the workshops of professionals and DIY enthusiasts.



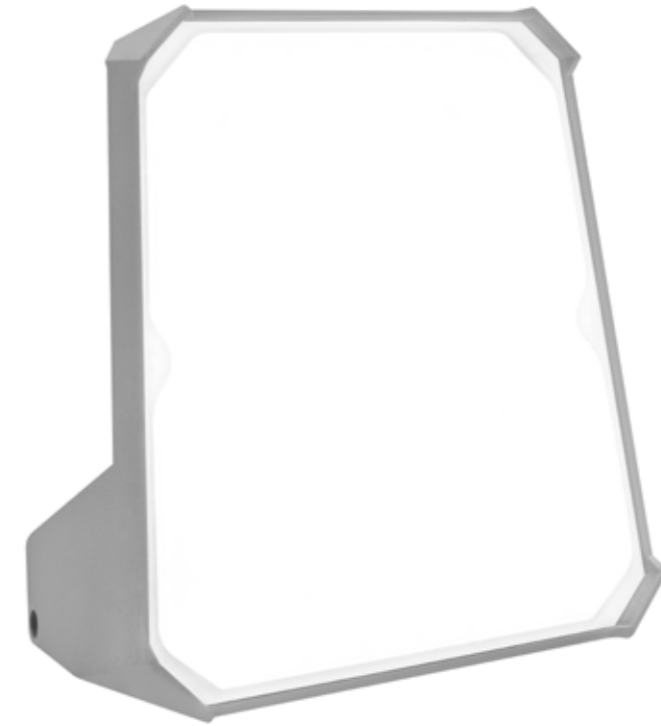


## Magnum Future LED XS Basic

Luminous flux [lm]:	1600	Index No	Cord length [m]
Colour temperature [K]:	4000	256943	3
Diffuser/body type:	frosted / PP		
Supply voltage [V]:	220-240		

### Features:

- Impact-resistant body
- Highest ingress protection
- Fastening band included





## Magnum **Hobby** **family**

Modern portable luminaires from the Hobby line. They can be successfully used wherever you need strong lighting, robust design and a number of enhancements that will make your work easier.

LED 32W IP54 IP44 IK10 I, II



## Magnum Hobby 32W


Luminous flux [lm]:	3600
Colour temperature [K]:	4000
Diffuser/body type:	frosted / PP
Supply voltage [V]:	220-240

Index No	Socket type	Cord length [m]
406447	-	3
406416	Typu E 1 pc	3

Versions with other plugs and sockets (DK, SCHUKO, CH) are also available.

### Features:

- It provides uniform and stable directional lighting
- It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.
- Small size and light weight



LED 50W IP54 IP44 IK10 I, II



## Magnum Hobby 50W


Luminous flux [lm]:	5500
Colour temperature [K]:	4000
Diffuser/body type:	frosted / PP
Supply voltage [V]:	220-240

Index No	Socket type	Cord length [m]
406492	-	3
406478	Typu E 1 pc	3

Versions with other plugs and sockets (DK, SCHUKO, CH) are also available.

### Features:

- Impact-resistant body
- Highest ingress protection
- Multi-position arm





LED 78W IP54 IP44 IK10 I, II




## Magnum Hobby 78W

Luminous flux [lm]:	9500	Index No	Socket type	Cord length [m]
Colour temperature [K]:	4000	406515	-	3
Diffuser/body type:	frosted / PP	406546	Typu E 1 pc	3

Versions with other plugs and sockets (DK, SCHUKO, CH) are also available.

### Features:

- It provides uniform and stable directional lighting
- It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.
- Small size and light weight



LED 40W IP54 IP44 IK10 I, II, III




## Taurus Smd LED

Luminous flux [lm]:	4200	Index No	Plug type	Socket type	Switch
Colour temperature [K]:	4000	291791	UNI-SCHUKO	-	-
Diffuser/body type:	frosted / PP	291845	UNI-SCHUKO	-	+
Supply voltage [V]:	220-240, 24, 42	291814	UNI-SCHUKO	Type E	-
		291869	UNI-SCHUKO	Type E	+

Versions with other plugs and sockets (DK, SCHUKO, CH) and low voltage versions are also available.

### Features:

- Impact-resistant body and multi-position arm
- Anti-glare diffuser made of frosted polycarbonate
- Wide illumination angle (120°)
- Rubber cable H07RN-F 2x1.0mm<sup>2</sup> (5m) – version without sockets or H07RN-F 3x1.5mm (5m) – version with sockets



LED  
5 2x3W IP40 IK10 III




## Handy Multi LED

Luminous flux [lm]:	240; 400	Index No	Colour temperature [K]
Rated power [W]:	5 2x3	608568	6500
Battery:	Li-ion 3,7V 2000mAh		
Charging:	+ 1.5m micro cable		
Charging time / illumination time [h]	3.5 / 2.5-4		

**Features:**

- Strong magnetic fastener in the base
- 2 lighting modes: 240 and 400 lm
- Smooth dimming and brightening
- Robust body
- Battery charge indicator

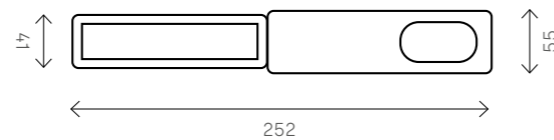

LED  
3, 5W IP40 IK07




## Handy Slim LED

Luminous flux [lm]:	140; 360	Index No	Colour temperature [K]
Rated power [W]:	3; 5	608698	6500
Battery:	Li-ion 3,7V 2000mAh		
Charging:	+ 1.5m micro cable		
Charging time / illumination time [h]	4 / 3.5-4.5		

**Features:**

- Strong magnetic fastener in the base
- 2 lighting modes: 140 and 360 lm
- Robust body
- Battery charge indicator

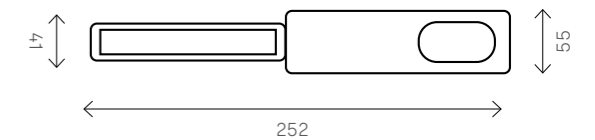



# Versatility of

— Ready to work in heavy duty conditions

The offer of hand-held LED luminaires by Lena Lighting is a response to the market demand. It is aimed at professionals, DIY enthusiasts and people who need proper lighting while devoting their time to their hobbies. The multitude of functions makes these luminaires a perfect solution used in construction sites, car workshops, for repairing machines, as well as in the garage, a small home workshop, in the garden, on the road, on the boat and camping. They provide a strong beam of light and a long working time



Workplace lighting **Standard**  
03 | Battery-powered hand lamps

NEW

LED 3+3W IP20 IK07 III




## Handy Future LED

Luminous flux [lm]:	150	Index No	Colour temperature [K]
Rated power [W]:	3W COB LED + 3W LED	608551	6500
Battery:	Li-ion 3,7V 1200mAh		
Charging:	+ 1.5m micro cable		
Charging time / illumination time [h]	4 / 1.5-10		

### Features:

- Strong magnetic fastener in the base
- Robust body
- 2 lighting modes
- Swivel hook
- Battery charge indicator



LED  
5W IP40 IK07 III




## Diuna Cob LED

Luminous flux [lm]:	200	Index No	Colour temperature [K]
Rated power [W]:	3W COB LED + 3W LED	334665	6500
Battery:	Li-ion 3,7V 2200mAh		
Charging:	connected directly to the USB module		
Charging time / illumination time [h]	4 / 5		

### Features:

- Strong magnetic fastener in the base
- Handle covered with rubber
- Swivel hook

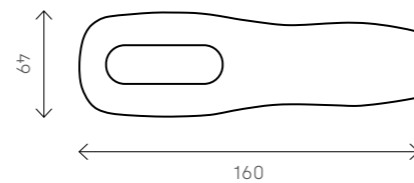

E27  
60W IP20 IK10 II




## Classic

Light source:	E27	Index No	Cord type	Cord length [m]
Rated power [W]:	max. 60	000058	H05VV-F	5
Diffuser/body type:	transparent / plastic			
Supply voltage [V]:	220-240			

### Features:

- Steel, galvanised
- protective grid
- Plastic handle

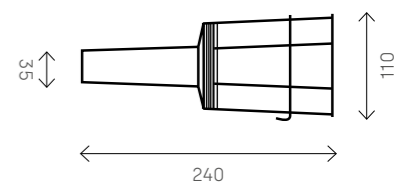




## Gummi / Gummi IP44

Light source:	E27, B22	Index No	Power [W]	Plug type	Ingress protection
Rated power [W]:	max. 60 - 100	892233	60	UK	IP20
Diffuser/body type:	glass / PP	000034	60	UNI	IP20
Supply voltage [V]:	220-240	892318	100	UK	IP20
		000089	100	UNI	IP20
		000133	60	UNI	IP44

**Features:**

- Steel, galvanised protective grid
- Handle and protective ring made of rubber

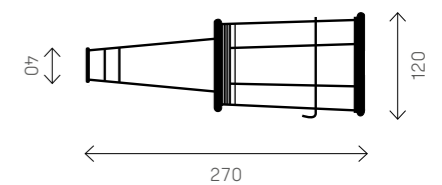

E27  
60W IP20 IK10 II




## Practic / Practic IP44

Light source:	E27	Index No	Power [W]	Body colour
Rated power [W]:	max. 100	000126	100	black
Diffuser/body type:	PC / PP	001123	100	orange
Supply voltage [V]:	220-240	012440	60	black

### Features:

- Steel, powder-coated protective grid
- Plastic handle
- Off switch in the handle

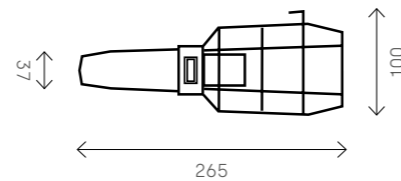

E27, B22  
60W IP20 IK07 II




## Plastic

Light source:	E27, B22	Nr Index No	Power [W]	Clip	Plug type
Rated power [W]:	60	892271	60	-	UK
Diffuser/body type:	glass / PP	000065	60	-	UNI
Supply voltage [V]:	220-240	000263	60	+	UNI

### Features:

- Plastic cover and handle
- Version with a clip available

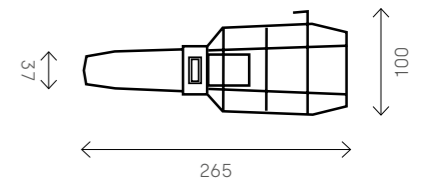

LED  
 10W; 2x5W;  
 3W IP40 IK07 III




## Head Multi LED

Luminous flux [lm]:	60; 500	Index No	Colour temperature [K]
Rated power [W]:	10W OSRAM P8 LED + 2x 5W COB LED + 3W COB LED	334498	6500
Battery:	Li-ion 3,7V 1500mAh		
Charger:	USB 100-240 AC/DC 5V1A + 1,5m micro		
Charging time / illumination time [h]	4.5h / 2.5 - 6		

### Features:

- Possibility to detach the illuminating part from the strip
- Luminaire equipped with a strong magnet
- Motion sensor

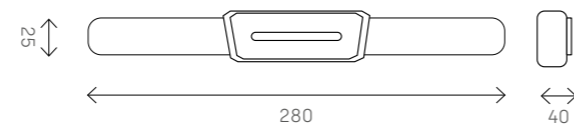



8W IP20 IK10 II



## Lena Electronic 8W


Luminous flux [lm]:	688
Colour temperature [K]:	6500
Diffuser/body type:	transparent / PP
Supply voltage [V]:	220-240

Index No	Luminaire body colour
895319	black
000096	blue

Versions with other plugs and sockets (DK, SCHUKO, CH) are also available.

### Features:

- Cover of the fluorescent lamp made of PVC
- Available with a 230V mains plug (Electronic model)

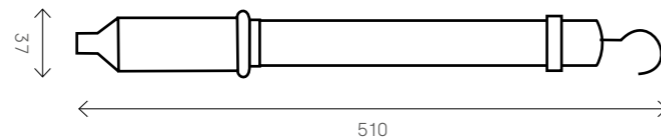

LED 4W IP20 IK10 II



## Effect LED 4W

Luminous flux [lm]:	400
Colour temperature [K]:	4000
Diffuser/body type:	transparent / PP
Supply voltage [V]:	220-240

Index No	Plug type
270109	UNI

### Features:

- Swivel hanger



# PERFECT WORKSHOP LIGHTING



Workplace lighting **Standard** ■  
07 | Mains-powered hand lamps

LED  
2W IP20 IK10 II





## Optim LED

Luminous flux [lm]:	230	Index No	Luminaire body colour
Colour temperature [K]:	4000	205958	black
Diffuser/body type:	transparent / PP		
Supply voltage [V]:	220-240		

### Features:

- Swivel hanger

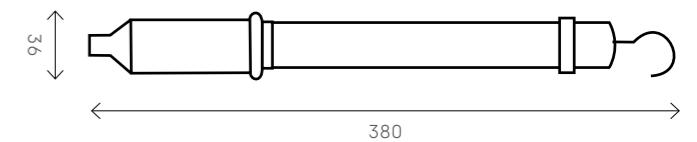

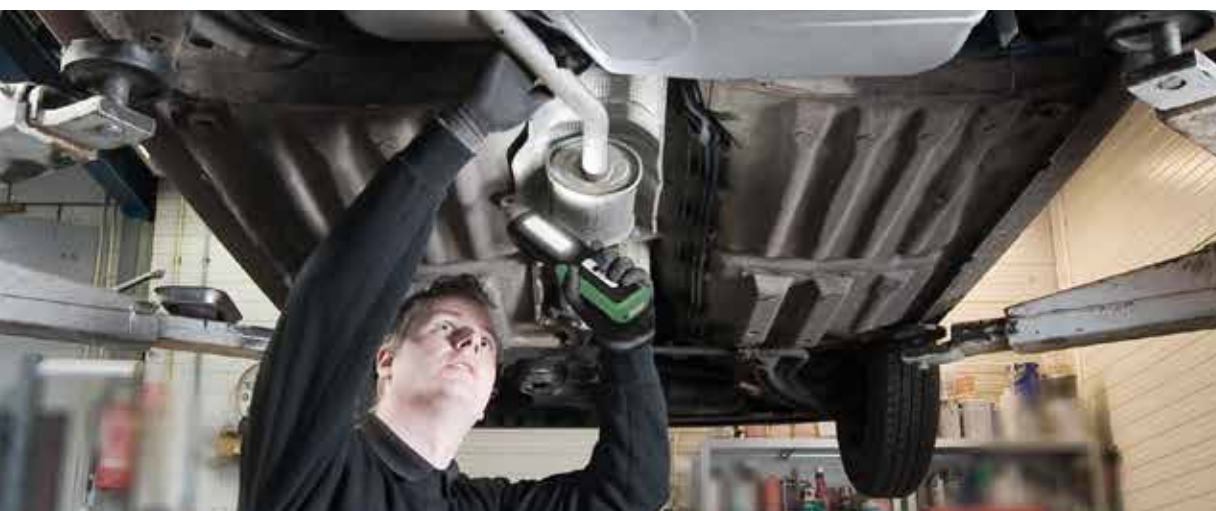

Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 (61) 28 60 300, e-mail: hello@lenalighting.com

[www.lenalighting.pl](http://www.lenalighting.pl)