



Lighting
Light Promo

2024 / 2025

■ Professional



Magnum MultiBattery XS

IP54 IK09



- Nominal power: 20 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux [lm]: 2300 lm**
- Made of impact-resistant polypropylene (PP)
- Equipped with a switch enabling 4-step regulation of luminous flux.
- Battery discharge indicator
- Battery-based operating mode for a 5 Ah battery:
 - » 200 lm, working time: 37 h 30 min
 - » 750 lm, working time: 12 h 30 min
 - » 1500 lm, working time: 6 h 15 min
 - » 2300 lm, working time: 3 h 45 min

| | | |
|--------|--|-----------|
| 249549 | Magnum MultiBattery XS EAN: 5905963249549 | 89,00 EUR |
|--------|--|-----------|

Magnum MultiBattery M

IP54 IK10



- Nominal power: 30 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux [lm]: 4050 lm**
- Made of impact-resistant polypropylene (PP)
- Equipped with a switch enabling 4-step regulation of luminous flux.
- Battery discharge indicator
- Battery-based operating mode for a 5 Ah battery:
 - » 500 lm, working time: 22 h 30 min
 - » 1850 lm, working time: 6 h 15 min
 - » 2750 lm, working time: 3 h 45 min
 - » 4050 lm, working time: 2 h 30 min

| | | |
|--------|---|------------|
| 249556 | Magnum MultiBattery M EAN: 5905963249556 | 129,00 EUR |
|--------|---|------------|

Magnum MultiBattery L

IP54 IK10



- Nominal power: 70 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux [lm]: 9250 lm**
- Made of impact-resistant polypropylene (PP)
- Equipped with a switch enabling 4-step regulation of luminous flux.
- Battery discharge indicator
- Battery-based operating mode for a 5 Ah battery:
 - » 1000 lm, working time: 12 h 30 min
 - » 3800 lm, working time: 3 h 15 min
 - » 5650 lm, working time: 2 h
 - » 9250 lm, working time: 1 h 30 min

| | | |
|--------|---|------------|
| 249563 | Magnum MultiBattery L EAN: 5905963249563 | 154,00 EUR |
|--------|---|------------|

Tower Lite MultiBattery

IP20 IK07



- **Luminaire's luminous flux [lm]: 10285 lm**
- Nominal power: 68 W
- Colour temperature: 4000 K
- Nominal supply voltage: 18 V
- Luminaire compatible with AmpShare 18 V batteries
- Battery-based operating mode for a 5 Ah battery:
 - » 1099 lm, working time: 12 h 30 min
 - » 3200 lm, working time: 3 h 15 min
 - » 6430 lm, working time: 2 h
 - » 10285 lm, working time: 1 h 30 min
- Dimensions: 1130/263/169 mm
- Luminaire net weight: 4500 g

| | | |
|--------|---|------------|
| 250248 | Tower Lite MultiBattery EAN: 5905963250248 | 254,00 EUR |
|--------|---|------------|



AmpShare 18 V batteries



- AMPShare 18 V is a slide-in battery offering long-lasting performance and efficient usage
- AMPShare batteries are fully compatible with all power tools across multiple brands, including those within the 18 V professional system of Bosch, Lena Lighting S.A., Rothenberger, Fein, and many more.
- The CoolPack housing protects the cells against excessive heating.
- The AMPShare Li-Ion battery has no memory effect or self-discharge function.
- AMPShare batteries are equipped with an "Electronic Cell Protection (ECP)" system", which safeguards against deep discharge and protects the battery cells in the event of a charging process interruption, without the risk of damaging the battery, which ensures that the power tool will be shut down by the protective circuit.
- Unmatched performance, long working time, exceptional durability – and likely the world's fastest charging technology.
- You no longer need to buy new batteries for each new power tool. You no longer have to search for the "right" battery. With the AMPShare platform, you only need one battery.

AmpShare 18 V quick charger



The AMPShare charger is a compact design that allows fast charging of AMPShare 18 V batteries. Impressive charging speed (18 V / 2.0 Ah to 80% within 36 minutes) enables interchangeable use of any battery set, ensuring continuous work. Compact dimensions make it suitable for easy transportation. Intuitive operation allows for effortless battery connection to the charger, and the straightforward labelling system provides clear information about the tool's status.

Key features of the AMPShare charger:

- Compact design
- Flexible Power System: compatibility with all AMPShare 18 V batteries
- AMPShare batteries are fully compatible with all power tools across multiple brands.

Magnum MultiBattery

A new innovative system that allows you to use the worklamp with various battery systems. If you are a user of wireless tools and you have Bosch 18V Professional batteries, this worklamp is for you. If you are a user of different battery systems (such as Makita, Milwaukee, DeWalt, Metabo, etc.), there is no need to worry – just use a dedicated adapter and you can enjoy the features of our worklamp as well.


Adapters compatible with:

Magnum
MultiBattery MMagnum
MultiBattery LTower Lite
MultiBattery

| | | |
|--------|--|-----------|
| 608827 | Adapter Festool 18 V EAN: 5905963608827 | 11,40 EUR |
| 608803 | Adapter Milwaukee / DeWalt 18 V EAN: 5905963608803 | 11,40 EUR |
| 608810 | Makita 18 V adapter EAN: 5905963608810 | 11,40 EUR |
| 608841 | Festool 18 V adapter EAN: 5905963608841 | 11,40 EUR |
| 608858 | Hikoki 18 V adapter EAN: 5905963608858 | 11,40 EUR |
| 608834 | Hilti 22 V adapter EAN: 5905963608834 | 11,40 EUR |

Magnum
MultiBattery XS

| | | |
|--------|--|-----------|
| 608681 | Adapter for Makita 18 V battery EAN: 5905963608681 | 22,90 EUR |
| 608650 | Battery adapter Milwaukee 18 V and DeWALT 18 V EAN: 5905963608650 | 22,90 EUR |

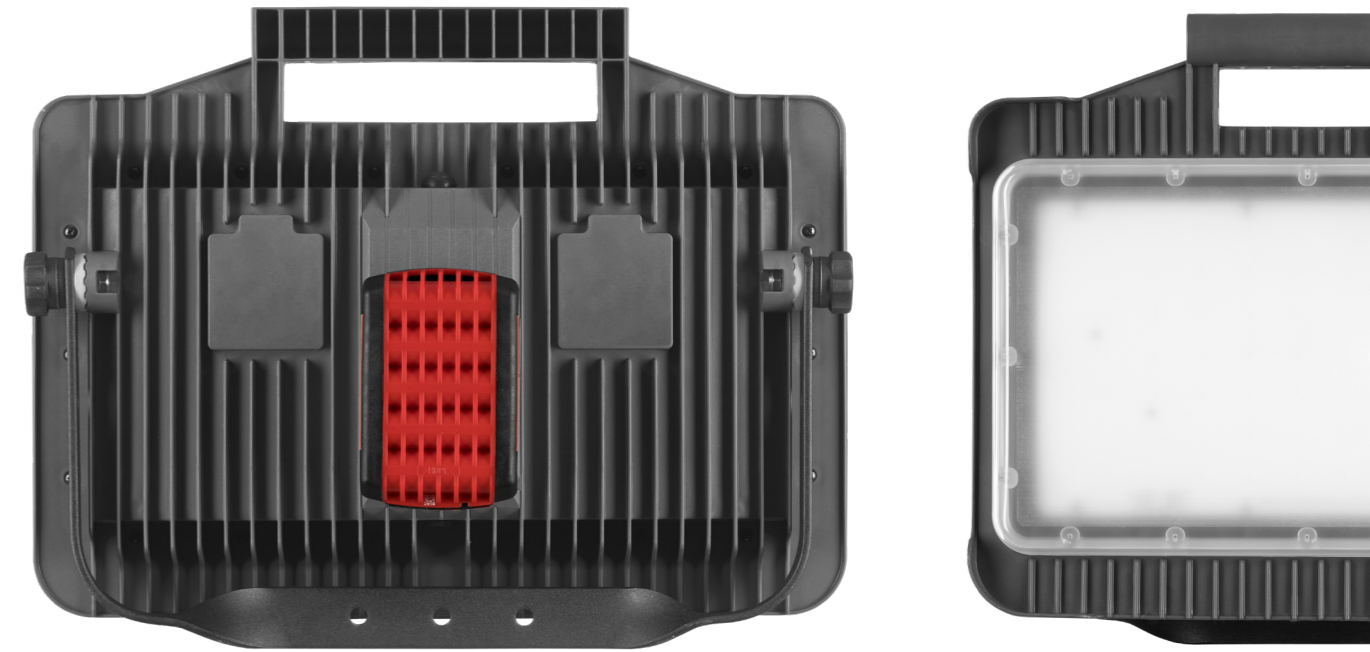

Accessories for luminaires from the Magnum MultiBattery and Tower Lite MultiBattery series

When purchasing a Magnum Battery or Tower Lite MultiBattery luminaire, the following accessories are available at a promotional price*:

* While stocks last

| | | |
|--------|---|------------|
| 000737 | 2 m Future Stand with Click Head system (quick installation of luminaires) EAN: 5905963000737 | 46,90 EUR |
| 249150 | AmpShare 18 V 2 Ah battery EAN: 5905963249150 | 31,50 EUR |
| 016011 | Set of 2 AmpShare 18 V 2 Ah batteries EAN: 5905963016011 | 60,00 EUR |
| 249167 | AmpShare 18 V 5 Ah battery EAN: 5905963249167 | 74,50 EUR |
| 016028 | Set of 2 AmpShare 18 V 5 Ah batteries EAN: 5905963016028 | 144,50 EUR |
| 249174 | AmpShare GAL 18V-40-EU quick charger EAN: 5905963249174 | 29,50 EUR |

Iluminator LED

Iluminator LED is the latest generation floodlight luminaire offering high power and high luminous flux. It is characterised not only by very high luminous efficiency, but also by high ingress protection (IP66) and impact resistance (IK09). These parameters have been achieved thanks to the use of branded components, a robust housing made of cast aluminium, and the implementation of a passive cooling system, allowing excess heat generated during the luminaires's operation to be dissipated. The LED Iluminator luminaire is designed for easy and quick installation – the lightweight steel arm can be secured to any supporting structure (wall, pole, crane, lift).

Application

Very good ingress protection and impact resistance parameters, ability to work in elevated temperatures – up to 45°C as standard and an extensive light distribution offer allow Iluminator LED luminaires to work in difficult weather conditions. It can be used and will prove perfect indoors in industrial, warehouse, sports halls or logistics centres, and outdoors – on sports fields, cranes, lifts or construction sites.



| | |
|--|--------------------------|
| Luminaire's rated power versions: [W] | 163, 562, 1124 |
| Luminaire's luminous flux versions [lm]: | 23.200, 75.400, 150.800 |
| Illumination angle [°]: | 90 |
| Ingress protection class: | IP66* |
| Impact resistance: | IK09 |
| Colour temperature [K]: | 4.000 |
| Nominal supply voltage [V]: | 220 – 240 V / 50 – 60 Hz |

* luminaire's ingress protection class featuring cord and plug: IP54



Illuminator LED 150 800 lm

IP66 IK09



- Rated power: 1124 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux: 150800 lm**
- Illumination angle: 90°
- Rubber cable with plug: 10 m
- Nominal supply voltage 220 – 240 V / 50 – 60 Hz

| | | |
|--------|--|--------------|
| 703324 | Illuminator LED 150 800 lm EAN: 5905963703324 | 1 198,00 EUR |
|--------|--|--------------|

Illuminator LED 75 400 lm

IP66 IK09



- Rated power: 562 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux: 75400 lm**
- Illumination angle: 90°
- Rubber cable with plug: 10 m
- Nominal supply voltage 220 – 240 V / 50 – 60 Hz

| | | |
|--------|---|------------|
| 703317 | Illuminator LED 75 400 lm EAN: 5905963703317 | 598,00 EUR |
|--------|---|------------|

Illuminator LED 23 200 lm

IP66 IK09



- Rated power: 163 W
- Colour temperature: 4000 K
- **Luminaire's luminous flux: 23200 lm**
- Illumination angle: 90°
- Rubber cable with plug: 5 m
- Nominal supply voltage 220 – 240 V / 50 – 60 Hz

| | | |
|--------|---|------------|
| 703300 | Illuminator LED 23 200 lm EAN: 5905963703300 | 249,00 EUR |
|--------|---|------------|

4.3 m steel stand



- Height when extended: 430 cm
- Height when folded: 140 cm
- Pipe diameter (top): 3.5 cm
- Load capacity: 50 kg
- Weight: 22.50 kg
- Colour: black
- Designed for: Magnum LED and Illuminator LED luminaires

| | | |
|--------|---|------------|
| 608773 | 4.3 m steel stand EAN: 5905963608773 | 249,00 EUR |
|--------|---|------------|

Mounting bracket



- Material: steel
- Colour: grey
- Intended use: for securing the LED Illuminator luminaire to 608773 stand

| | | |
|--------|--|-----------|
| 994845 | Mounting bracket EAN: 5905963994845 | 99,00 EUR |
|--------|--|-----------|

Giant LED EVO

IP54 IK10



- **Luminaire's luminous flux [lm]: 33144/45000 lm**
- Light source: High-performance SMD LED
- Power: 227/300W
- Impact-resistant body and ergonomic handle
- Rubber cable H07RN-F 3x1.5mm² (5m)
- Two sockets for connecting other electrical devices or connecting luminaires in series
- Dimensions: 740/420/320 mm

| | | |
|--------|--|------------|
| 901263 | Giant LED EVO 227 W FRENCH sockets EAN: 5905963901263 | 254,90 EUR |
| 901256 | Giant LED EVO 227W SCHUKO sockets EAN: 5905963901256 | 254,90 EUR |
| 901300 | Giant LED EVO 300 W FRENCH sockets EAN: 5905963901300 | 324,90 EUR |
| 901294 | Giant LED EVO 300 W SCHUKO sockets EAN: 5905963901294 | 324,90 EUR |

Magnum Future LED XL MAX PLUS

IP54 IK10



- **Luminaire's luminous flux [lm]: 6500 / 11000 / 14000 lm**
- Nominal power: 50 / 78 / 105 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- Rubber cable H07RN-F 3x1.5mm² (5m)
- Two sockets + switch
- Luminaire net weight: 3400/3600/3700 g

| | | |
|--------|---|------------|
| 247460 | MF LED 50 W FRENCH sockets EAN: 5905963247460 | 104,50 EUR |
| 247453 | MF LED 50 W SCHUKO sockets EAN: 5905963247453 | 104,50 EUR |
| 248955 | MF LED 78 W FRENCH sockets EAN: 5905963248955 | 129,50 EUR |
| 248931 | MF LED 78 W SCHUKO sockets EAN: 5905963248931 | 129,50 EUR |
| 244575 | MF LED 105 W FRENCH sockets EAN: 5905963244575 | 139,50 EUR |
| 244582 | MF LED 105 W SCHUKO sockets EAN: 5905963244582 | 139,50 EUR |

Magnum Future LED 32W

IP54 IK10



- **Luminaire's luminous flux [lm]: 4300 lm**
- Nominal power: 32 W
- Colour temperature: 4000 K
- Nominal supply voltage: 220-240 V
- Rubber cable H07RN-F 3x1.5mm² (5m)
- Two sockets for connecting other electrical devices or connecting luminaires in series
- Switch
- Dimensions: 300/400/100 mm
- Illumination angle: 120°
- Luminaire net weight: 2900 g

| | | |
|--------|--|-----------|
| 247040 | Magnum Future LED 32 W with FRENCH sockets EAN: 5905963247040 | 84,50 EUR |
| 247057 | Magnum Future LED 32 W with SCHUKO sockets EAN: 5905963247057 | 84,50 EUR |

Magnum Battery XS 20 W Cable

IP54 IK10



- **Luminaire's luminous flux [lm]: 2300 lm**
- Nominal power: 20 W
- Colour temperature: 4000 K
- Nominal supply voltage: 220-240 V / 18 V
- Rubber cable H07RN-F 3x1.5mm² (3m)
- One socket
- Dimensions: 192/193/123 mm
- Luminaire net weight: 1100 g

| | | |
|--------|--|-----------|
| 248368 | Magnum Future LED 20W with FRENCH socket EAN: 5905963248368 | 49,90 EUR |
| 248405 | Magnum Future LED 20W with SCHUKO socket EAN: 5905963248405 | 49,90 EUR |



Tower Lite LED 94 W

IP54 IK07



- Luminaire's luminous flux [lm]: **9200 lm**
- Nominal power: 94 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Dimensions: 1130/263/169 mm
- Luminaire net weight: 4700 g

| | | |
|--------|---|------------|
| 622359 | Tower Lite LED 94 W EAN: 5905963622359 | 139,50 EUR |
|--------|---|------------|

Plaster Lite Future LED

IP54 IK07



- The basic tool of every foreman applying plaster and finishing coat**
- Nominal power: 49 W
 - Colour temperature: 4000 K
 - Luminaire's luminous flux [lm]: 6400 lm
 - Nominal supply voltage: 220-240 V
 - Luminaire net weight: 3500 g
 - Rubber cable H07RN-F 3x1.5mm² (5m)
 - Fast assembly on a stand possible index no: 000737

| | | |
|--------|---|------------|
| 359217 | Plaster Lite Future LED EAN: 5905963359217 | 164,50 EUR |
|--------|---|------------|

Flato LED M

IP54 IK08



- Luminaire's luminous flux [lm]: **1750 lm**
- Nominal power: 17 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Luminaire with an arm available as option
- Dimensions: 132/185/74 mm
- Luminaire net weight: 650 g

| | | |
|--------|---|-----------|
| 622021 | Flato LED M EAN: 5905963622021 | 27,90 EUR |
| 622427 | Flato LED M with an arm EAN: 5905963622427 | 29,90 EUR |

Flato LED L

IP54 IK07



- Luminaire's luminous flux [lm]: **4600 lm**
- Nominal power: 47 W
- Colour temperature: 4000 K
- Nominal supply voltage 220-240 V
- H07RN-F 2x1 mm² (3 m) rubber cable
- Dimensions: 236/261/64 mm
- Luminaire net weight: 1000 g

| | | |
|--------|-----------------------------------|-----------|
| 622199 | Flato LED L EAN: 5905963622199 | 44,90 EUR |
|--------|-----------------------------------|-----------|



Flex Line LED

IP44 IK07



- Construction LED strip – perfect lighting for the construction site**
- Luminaire's luminous flux [lm]:
 - » 10 m variant – 6630 lm
 - » 15 m variant – 9945 lm
 - » 20 m variant – 13260 lm
 - LED quantity: 120 pcs/m
 - Nominal power: 8 W/m
 - Colour temperature: 4000 K
 - Nominal supply voltage 220-240 V
 - 1.5 m H07RN-F 2x1.5 mm² power cord
 - Luminaires can be connected in series

| | | |
|--------|--|-----------|
| 608728 | Flex Line LED 10 m EAN: 5905963608728 | 39,00 EUR |
| 608735 | Flex Line LED 15 m EAN: 5905963608735 | 54,00 EUR |
| 608742 | Flex Line LED 20 m EAN: 5905963608742 | 74,00 EUR |

Future Ball LED

IP54 IK10



- 360° light distribution – a perfect choice for painters and plasterer**
- Luminaire's luminous flux [lm]: 2400 lm
 - Nominal power: 20 W
 - Colour temperature: 4000 K
 - Nominal supply voltage 220-240 V
 - H07RN-F 3x1.5 mm² (5 m) rubber cable
 - Two sockets for connecting other electrical devices or connecting luminaires in series + switch
 - Dimensions: 244/237/236 mm

| | | |
|--------|--|-----------|
| 619236 | Future Ball LED FRENCH sockets EAN: 5905963619236 | 84,50 EUR |
| 619212 | Future Ball LED SCHUKO sockets EAN: 5905963619212 | 84,50 EUR |



4.3 m steel stand



- Height when extended: 430 cm
- Height when folded: 140 cm
- Pipe diameter (top): 3.5 cm
- Load capacity: 50 kg
- Weight: 22.50 kg
- Colour: black
- Designed for: Magnum LED and Illuminator LED luminaires

| | | |
|--------|---|------------|
| 608773 | 4.3 m steel stand EAN: 5905963608773 | 249,00 EUR |
|--------|---|------------|



IP44 drum extension cords

Professional construction extension cords (IP44) are specialised extension cords intended for use on construction sites or in workshops. The rubber cable is wound on a drum to facilitate its coiling and transportation. The high ingress protection (IP44) also allows it to be used outdoors in different weather conditions.

Our extension cords are characterised by the following features:

- Regardless of the cable's length, they allow for quick unwinding and coiling
- Thanks to their well-thought-out design, drum extension cords are easy to use and significantly improve working comfort.
- The extension cord is suitable for use in workshops, on construction sites, for household purposes, and for garden works
- The extension cord features a built-in thermal switch to prevent overheating
- The IP44 outlets with are equipped with covers, allowing for outdoor use in different weather conditions
- The drum features a cable handle and a brake mechanism to prevent accidental and excessive unwinding of the extension cord
- It is perfect for connecting various electrical devices such as power tools, lawnmowers, vacuum cleaners, construction equipment, and many more
- It is made of a flexible cable that facilitates coiling

3 m steel stand



Professional steel stand for heavy loads

- Height when extended: 300 cm, folded: 120 cm
- Leg spacing: 134 cm
- Pipe diameter (legs): 2, 5 cm
- Load capacity: 15 kg
- Weight: 5.4 kg
- Available version with mounts to attach the stand to the ground
- Accessories available:
 - » Single crossbar for mounting the Giant luminaire
 - » CLICK HEAD system enabling quick installation of the luminaires

| | | |
|--------|---|-----------|
| 000294 | 3 m steel stand EAN: 5905963000294 | 74,00 EUR |
| 250385 | 3 m steel stand with securing mounts EAN: 5905963250385 | 78,00 EUR |
| 000300 | Crossbar for mounting the Giant luminaire on a stand EAN: 5905963000300 | 29,50 EUR |
| 000812 | CLICK HEAD system enabling quick installation of the luminaires EAN: 5905963000812 | 14,90 EUR |

Steel FUTURE STAND



Professional stand with a quick-mount head for luminaires

- Future Stand with Click Head system
- Stand enabling tool-free and quick assembly of all luminaires from the Magnum Future family
- Height when extended: 200 cm or 300 cm
- Height when folded: 108 cm
- Leg spacing: 92 cm
- Pipe diameter (legs): 3.5 cm
- Load capacity: 15 kg
- Weight: 2300 g
- Colour: black
- Accessories available:
 - » CLICK HEAD system enabling quick installation of the luminaires

| | | |
|--------|---|-----------|
| 000737 | Future Stand EAN: 5905963000737 | 59,50 EUR |
| 000812 | CLICK HEAD system enabling quick installation of the luminaires EAN: 5905963000812 | 14,90 EUR |
| 608766 | 3 m Future Stand with the Click Head system EAN: 5905963608766 | 69,50 EUR |



| | | |
|--------|---|------------|
| 612381 | IP44 25 m H07RN-F 3G 1.5 mm ² (french standard) EAN: 5905963612381 | 59,00 EUR |
| 612343 | IP44 25 m H07RN-F 3G 1.5 mm ² (SCHUKO standard) EAN: 5905963612343 | 59,00 EUR |
| 612398 | IP44 40 m H07RN-F 3G 1.5 mm ² (french standard) EAN: 5905963612398 | 79,00 EUR |
| 612350 | IP44 40 m H07RN-F 3G 1.5 mm ² (SCHUKO standard) EAN: 5905963612350 | 79,00 EUR |
| 612404 | IP44 25 m H07RN-F 3G 2.5 mm ² (french standard) EAN: 5905963612404 | 79,00 EUR |
| 612367 | IP44 25 m H07RN-F 3G 2.5 mm ² (SCHUKO standard) EAN: 5905963612367 | 79,00 EUR |
| 612411 | IP44 40 m H07RN-F 3G 2.5 mm ² (french standard) EAN: 5905963612411 | 104,00 EUR |
| 612374 | IP44 40 m H07RN-F 3G 2.5 mm ² (SCHUKO standard) EAN: 5905963612374 | 104,00 EUR |

Multi Light LED



- Luminous flux:
 - » Torch-type head – max. 273 lm
 - » SLIM hand lamp-type head – max. 385 lm
 - » Flexible head with integrated light source – max. 199 lm
 - » SLIM flexible head with integrated light source – max. 3 lm
- Protection class III
- Battery (2x) – 3.6 V 2600 mAh with a built-in charging socket (Type C).
- A USB cable with a Type C connector for charging the luminaire or the battery

608759 Multi Light LED
EAN: 5905963608759 79,50 EUR

Crane COB LED



- Light source: 5 W COB LED + 1 W SMD LED (top)
- Luminous flux: 5 W COB – 1m, 1 W SMD – 120 lm
- Strong magnetic fastener in the base
- Protection class III
- 100-240 AC/DC 5 V 1 A + 1,5 m] Type C USB charger included
- 3.7 V 2600 mAh Li-Ion battery
- Battery charge and discharge indicator
- Lamp movable in the range of 120°
- Charging time: 3 h
- Working time (battery): 3 h

334764 Crane COB LED
EAN: 5905963334764 44,50 EUR

Profi Service Set Accu LED



Worklamp for engine compartment works – adjustable width from 117 to 197 cm

- Luminaire's luminous flux: max. 2000 lm
- Working time: 500 lm/ 4 h; 1000 lm/ 2 h; 2000 lm/ 1 h
- Light source: 50x SMD LED
- 3.7 V 4800 mAh Li-Ion battery
- Charging time: 4 h
- Rubber handle to prevent scratches on the paintwork
- Replaceable battery: Option to charge the battery separately (outside the luminaire) or to purchase an spare battery
- Dimensions: 1170/110 mm
- Weight: 1100 g

334788 Profi Service Set Accu LED
EAN: 5905963334788 79,00 EUR

Profi Service Set



- Power: 12 W
- Luminous flux: 1200 lm
- Light source: SMD LED
- Matte diffuser made of polycarbonate
- Bar and lid made of ABS
- Ingress protection class: IP44
- Rubber cable: H05RN-F 2x1 mm² (5 m)
- Rubber handle to prevent scratches on the paintwork
- Grip distance: 105 – 170 cm.
- Set weight: 1.2 kg

267215 Profi Service Set LED
EAN: 5905963267215 59,00 EUR

Crop Future LED



- Light source: 4 W COB LED + 4 W SMD LED (head)
- Lighting time: 400 lm - 3.5 h, 120 lm - 10 h
- Protection class III
- Type C 1 m USB charging cable included
- Ingress protection class: IP54
- Dimensions: 255/58/45 mm
- Weight: 110 g
- 3.7 V 2600 mAh Li-Ion battery
- Charging time: 3 h
- Magnet in the base of the luminaire

608599 Crop Future LED
EAN: 5905963608599 34,50 EUR

Mustang LED



A perfect solution for Car detailing - it perfectly highlights "holograms" and the unfinished body surface.

- Lighting time: 1000 lm – 1.5 h, 60 lm – 24 h
- Luminous flux: 60 - 1000 lm
- Strong magnetic fastener in the base
- 100-240 AC/DC 5 V 1 A USB charger included
- 3.7 V 5200 mAh Li-Ion battery
- Charging time: 4 h
- Lamp movable in the range of 120°
- Weight: 450 g

334672 Mustang LED
EAN: 5905963334672 69,50 EUR

Cyclop LED



- Light source: COB LED
- Lighting time: 300 lm - 2.5 h, 150 lm - 4 h
- Top element movable in the range of 60°
- Protection class III
- 1 m Type C charging cable included
- Dimensions: 78/475/42 mm
- Weight: 110 g
- 3.7 V 1500 mAh Li-Ion battery
- Luminaire fitted with a motion sensor
- Non-slip strap

334689 Cyclop LED
EAN: 5905963334689 34,50 EUR



The suggested prices do not include VAT

The promotional campaign lasts while stocks last!

From the moment the above promotional leaflet comes into force, all current promotional campaigns shall expire. Sale carried out through specialised points only. We reserve the right to correct errors and change technical descriptions of products during the promotion. Prices valid until the end of September 2025.



Lena Lighting

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 (61) 28 60 300, e-mail: omp@lenalighting.pl

www.lenalighting.com

Distributor: